


REQ. PER UNIT	USED ON		NP885	Ø
	MODEL	ASS'Y. NO.		
1	ATS-50-2A		12/30/66	

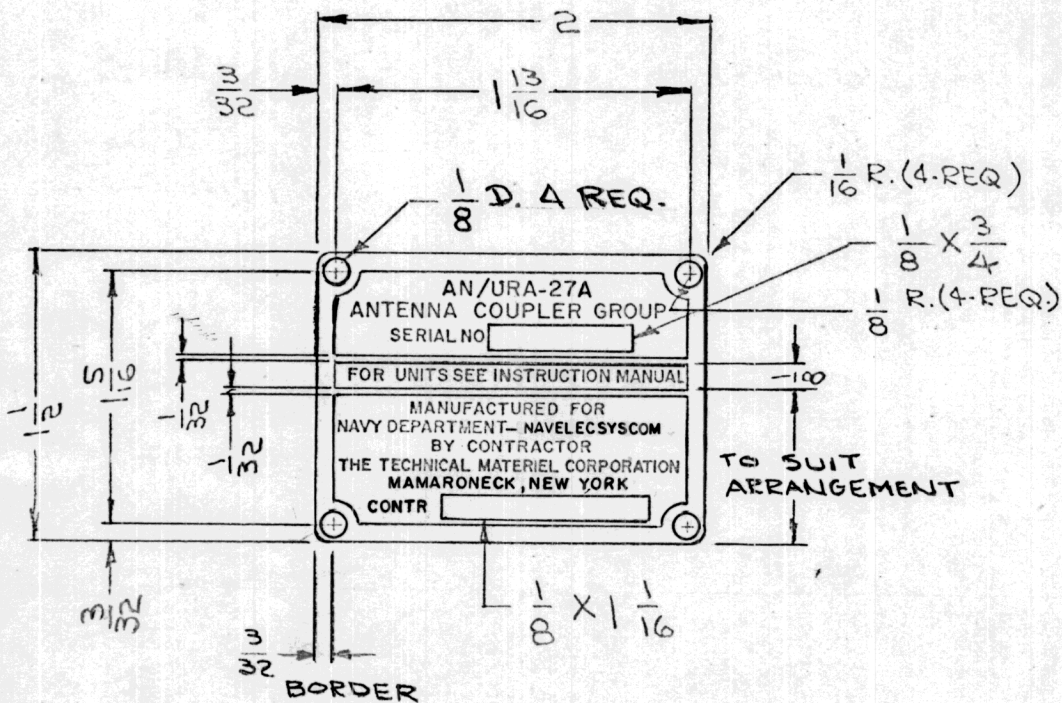

NOTE: FINISH

REVERSE ETCH, ANODIZE ON LUSTER-LESS ORANGE BACKGROUND (TYPE 32246) PER FED-STD-595.

4 HOLES - 1/8 DIA
 SERIAL BLOCK = 1/8 x 3/4
 CONT. BLOCK = 1/8 x 1-1/16

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024 (SHIPS) AND AMENDS. (TYPE "A")

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	.032 THK	THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE	MAMARONECK, NEW YORK	
Ø	ORIG RELEASE FOR PROD	6-21-67	Ø RG
X	EXPERIMENTAL RELEASE	12/30/66	X RME
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS	FRACTIONS	CODE	
.X ± .05	± 1/64		
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		
	5052-H32	RME	
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN CHECKED FINAL APPROVAL
	SEE NOTE		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
		NP885	Ø