


REQ. PER UNIT	USED ON		NP961	Ø
	MODEL	ASS'Y. NO.		

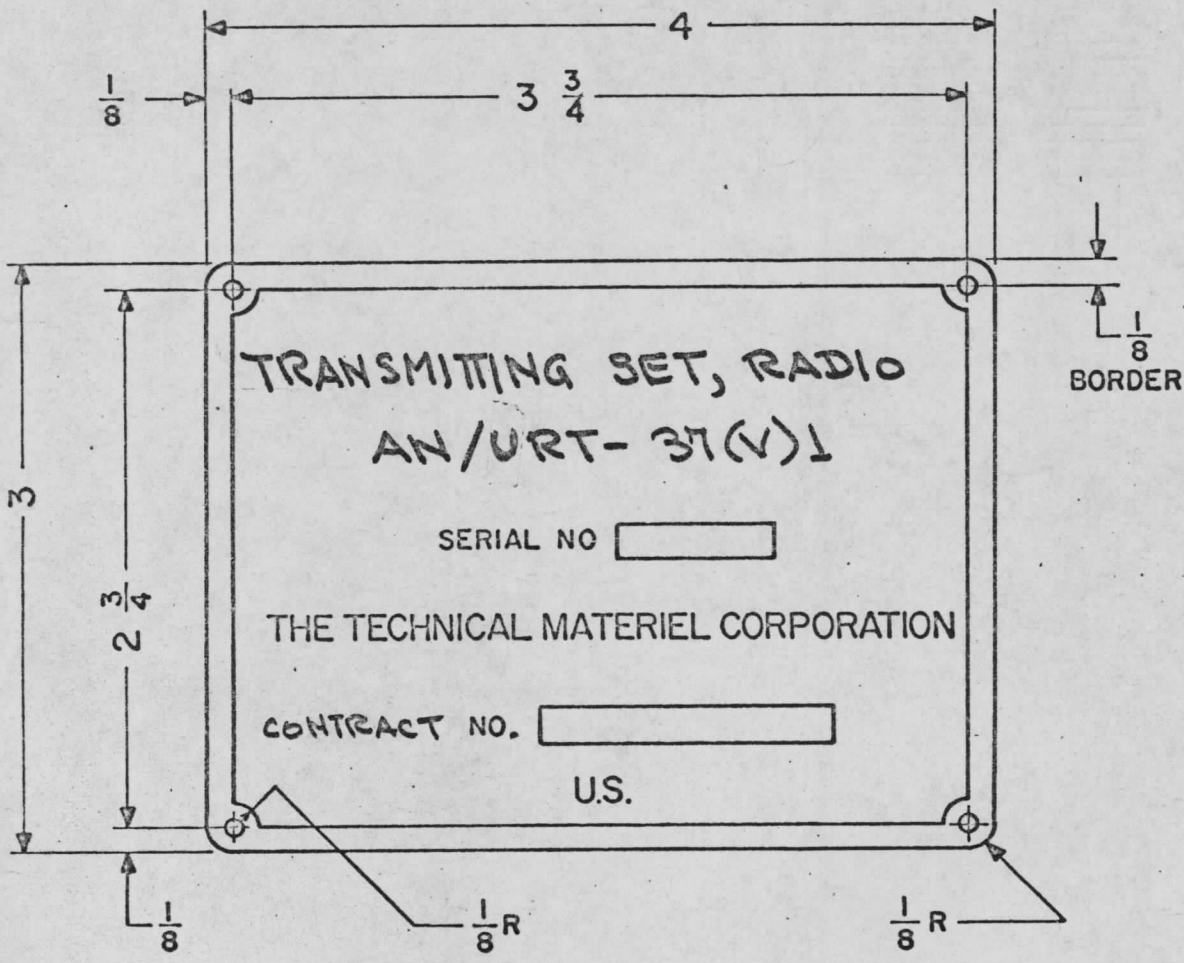

FINISH-  
REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER. FED. STD. 595. COLORLESS VARNISH PER. MIL-V-6894.

MIN. LETTER SIZE 3/64" HIGH.

ORDER & SERIAL NO'S. WILL BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 & MIL-M-13231A & AMENDS. (REF: SIGNAL CORPS).

4 HOLES 1/8 DIA.  
SERIAL BLOCK 3/16 X 3/4  
ORDER BLOCK 3/16 X 1-1/2

SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE	6/9/69	Ø	CDD				.032 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXPER. RELEASE		X	l. S. Swan				STOCK SIZE			
								ALUMINUM	NAMEPLATE, IDENTIFICATION		
								MATERIAL	TMC MODEL GPTR-10KYA		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			5052-H32	—A	G. Swan	CDD	EPM 6/9/69
	DECIMALS X ± .05 XX ± .01 XXX ± .005		TOLERANCES				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE				SEE NOTES				
			A				FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP961