


|               |         |            |      |       |   |
|---------------|---------|------------|------|-------|---|
| REQ. PER UNIT | USED ON |            |      | NP969 | Ø |
|               | MODEL   | ASS'Y. NO. | DATE |       |   |
|               |         |            |      |       |   |

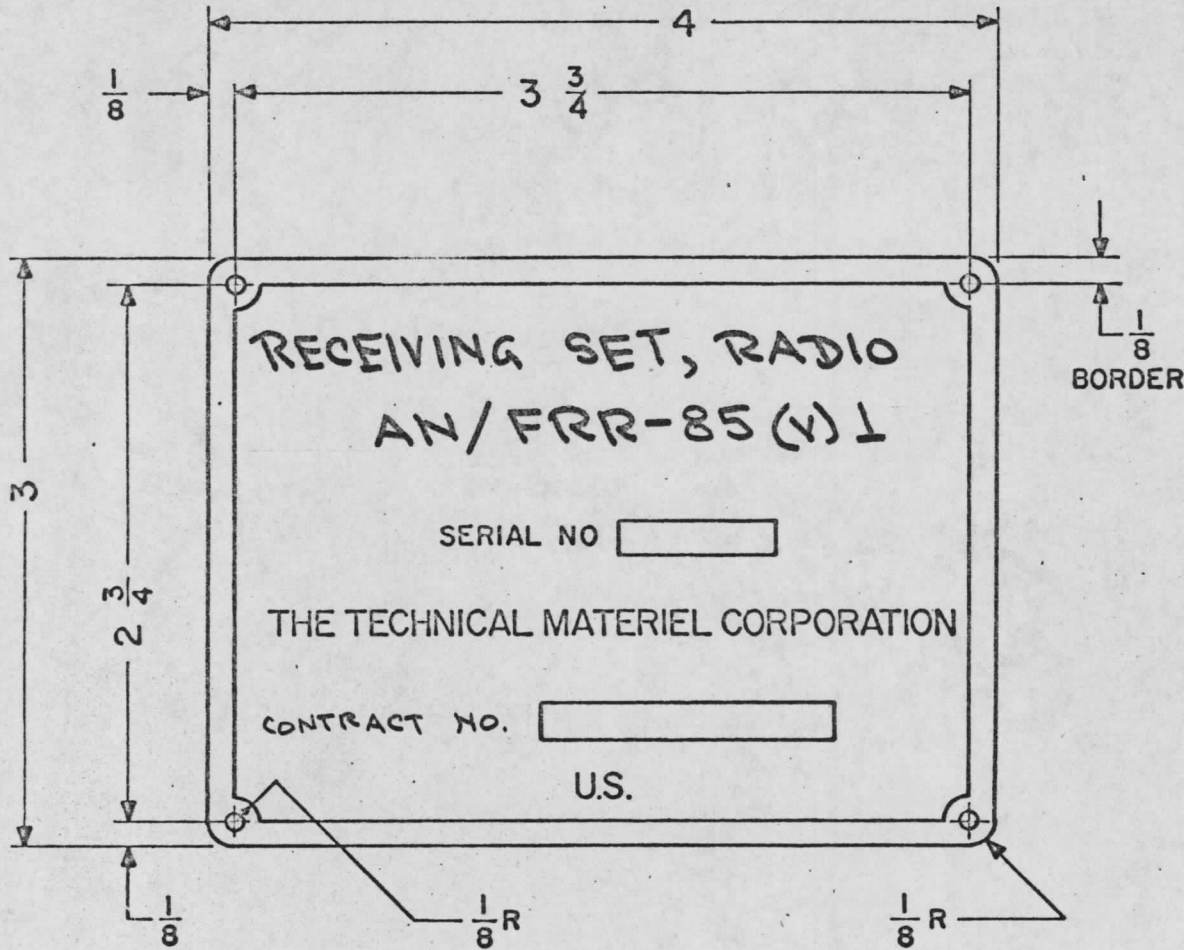

FINISH-  
REVERSE ETCH ON LUSTERLESS BLACK  
BACKGROUND (TYPE 37038) PER. FED. STD.  
595. COLORLESS VARNISH PER. MIL-V-6894.

MIN. LETTER SIZE 3/64" HIGH.

ORDER & SERIAL NO'S. WILL BE STEEL  
STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH  
MIL-STD-130 & MIL-M-13231A & AMENDS.  
(REF: SIGNAL CORPS).

4 HOLES 1/8 DIA.  
SERIAL BLOCK 3/16 X 3/4  
ORDER BLOCK 3/16 X 1-1/2

| SYM   | DESCRIPTION      | DATE                                      | CH. NO.   | DRAFTS      | CHECKER | ENG. APP.   | REQ. ITEM               | PART NO. | DESCRIPTION  | SYMBOL           |                 |          |       |                    |   |  |
|---|------------------|---|-----------|-------------|---------|-------------|-------------------------|----------|--|------------------|-----------------|----------|-------|--------------------|---|--|
| Ø   | ORIGINAL RELEASE | 6/9/69                                    | Ø         | CDD         |         | <i>file</i> | .032 THK.<br>STOCK SIZE |          | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK. NEW YORK |                  |                 |          |       |                    |   |  |
| X   | EXPER. RELEASE   |   | X         | <i>h.d.</i> |         |             | ALUMINUM                |          | NAMEPLATE, IDENTIFICATION                            |                  |                 |          |       |                    |   |  |
|   |                  |   |           |             |         |             | MATERIAL                |          | TMC MODEL DDRR-10N 2                                 |                  |                 |          |       |                    |   |  |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES AND INCLUDE<br>CHEMICALLY APPLIED OR PLATED FINISHES |                  |   |           |             |         |             | SCALE                   | 5052-H32 |  | DRAWN            |                 | CHECKED  |       | FINAL APPROVAL     |   |  |
|   |                  |   |           |             |         |             |                         | 1:1      | HEAT TREAT. SPEC.                                    | <i>G. Searcy</i> |                 | <i>Ø</i> |       | <i>SPM 6/19/69</i> |   |  |
| DECIMALS<br>C ± .05<br>CX ± .01<br>CXX ± .005   | TOLERANCES       | FRACTIONS<br>± 1/64<br>ANGLES<br>± 0° 30' | CODE<br>A |             |         |             | SEE NOTES               |          |  |                  |                 |          | NP969 |                    | Ø |  |
|   |                  |   |           |             |         |             | FINISH & SPEC. NO.      |          | ELEC. DES. APP.                                      |                  | MECH. DES. APP. |          |       |                    |   |  |