


REQ. PER UNIT	USED ON		NP972	Ø
	MODEL	ASS'Y. NO.		

FINISH -
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK
 BACKGROUND. (TYPE 37038) PER-FED-STD-595.
 COLORLESS VARNISH PER MIL-V-6894.

MIN LETTER HEIGHT 3/64"

ORDER & SERIAL NUMBERS TO BE STEEL
 STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH
 MIL-STD-130 & MIL-M-13231 & AMENDS.

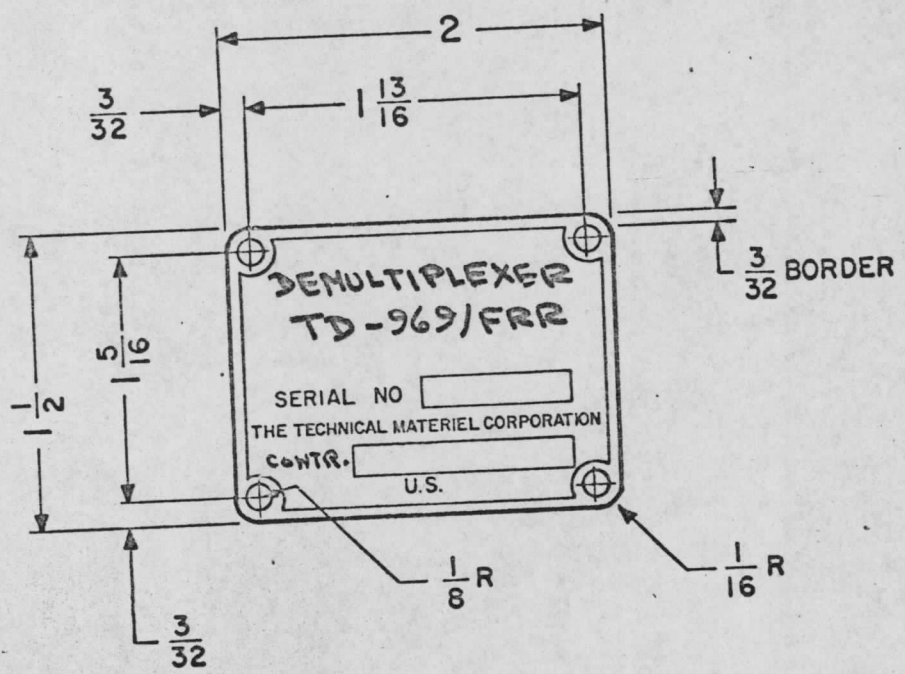

4 HOLES - 1/8 DIA.
 SERIAL BLOCK - 5/32 x 3/4
 ORDER BLOCK - 5/32 x 1-1/8

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE	9/9/69	Ø	EDD		fde			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	EXPER. RELEASE		X					.032 THK. STOCK SIZE	NAMEPLATE, IDENTIFICATION	
								ALUMINUM MATERIAL	TMC MODEL MSAR-5	
							5052-H32	—A	5052-H32	
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
							SEE NOTE		FINAL APPROVAL	
							FINISH & SPEC. NO.			NP972
									ELEC. DES. APP.	MECH. DES. APP.