REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE

NS-124 C

TMC NO.	MFG. NO.	MFG. CORE TYPE	DIM. A	DIM. B	DIM. C	DIM. "D" RESISTOR LENGTH	USED WITH TMC RESISTOR TYPE	T	RESISTOR I.D.
NS-124-1	768	A	3/4	13/16	5/16	2"	RW-111, RA-108(25W)	6-32	29/64
NS-124-2	769	B	1-1/32	5/8	13/32	4-1/2"	RW-105, RA-108(50W)	6-32	17/32
NS-124-3	769	B	1-1/32	5/8	13/32	6-1/2"	RA-108(80W)	6-32	17/32
NS-124-4	754	D	1-1/8	1-1/4	1/2	6-1/2"	RA-108(100W)	10-32	3/4
NS-124-5	754	D	1-1/8	1-1/4	1/2	8-1/2	RA-108(160W) RW-117	10-32	3/4
NS-124-6	754	D	1-1/8	1-1/4	1/2	10-1/2	RA-108(200W) RW-116	10-32	3/4
NS-124-7	768	T	3/4	13/16	5/16	2"	RW-110 (20W)	6-32	25/64

Note - Mfg. will Supply Ass'y. as shown, consisting of :
- 1 ea. Screw
- 1 ea. Flat Washer
- 1 ea. Split Washer
- 2 ea. Square Nut
- 2 ea. Porcelain Bushing

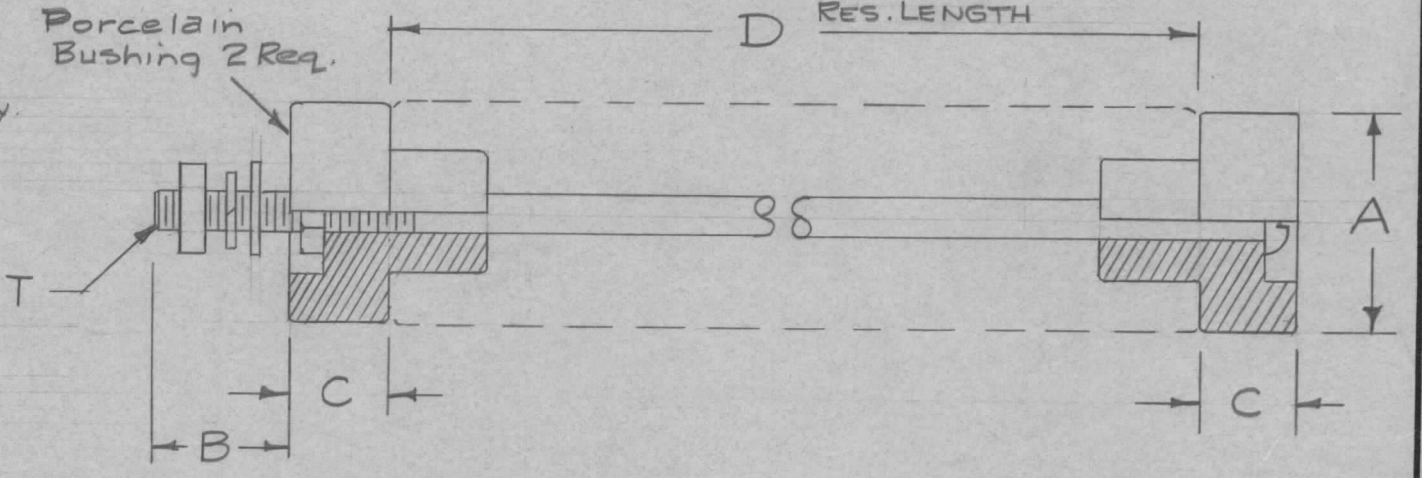

Ref - TMC PO-159 (Centering Washer Type)
Ref - Ward Leonard Electric Co.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		SQ NUT WAS HEX	12.12.66	17439	WHW	JCB	
B		-1,-2,-3 & -7 WAS 8-32	5/4/66	16203	WHW	JCB	
A	1	Resistor ID Added.	5/19/58	1	16		A.J.J.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

Insulator, Resistor Mtg.

DRAWN	CHECKED	FINAL APPROVAL
4-30-58		A.J.J.

ELEC. DES. APP. | MECH. DES. APP.

NS-124 C

FORM-108-A