NS-128

TMC PART NO.	BREAK DOWN VOLTAGE	DIMENSION (INCHES) A	B	C	D	E
NS-128-1	18K	1.25	.721	.60	1	.265
NS-128-2	30K	1.88	1.28	.60	1	.265

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE

NS-

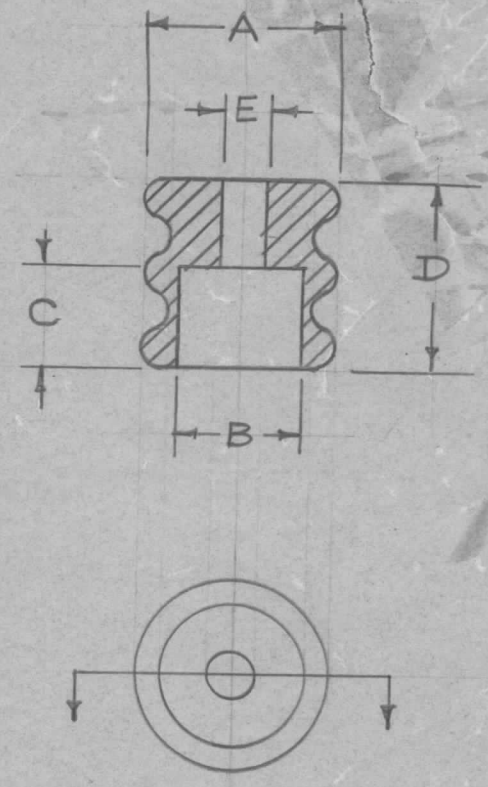

Note - Mates with NS-127

Torn by L. Gabel

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	NS-128-1 "A" DIM. WAS 1.00	8/12/59	1	16	[signature]	[signature]

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: S-401-69

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			BUSHING, INSULATED, FEMALE	

STOCK SIZE: STEATITE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

GLAZED

FINISH & SPEC. NO.

DRAWN	CHECKED	FINAL APPROVAL
16	[signature]	[signature]

ELEC. DES. APP.	MECH. DES. APP.		
[signature]	[signature]	NS-128	A

FORM 108-A