


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
X1		SEE SHEET (1)	1/28/66			
Ø		ORIGINAL RELEASE FOR PRODUCTION	2/3/66			
A		RELOCATE C5, C6	3-14-66	19265	CRS	

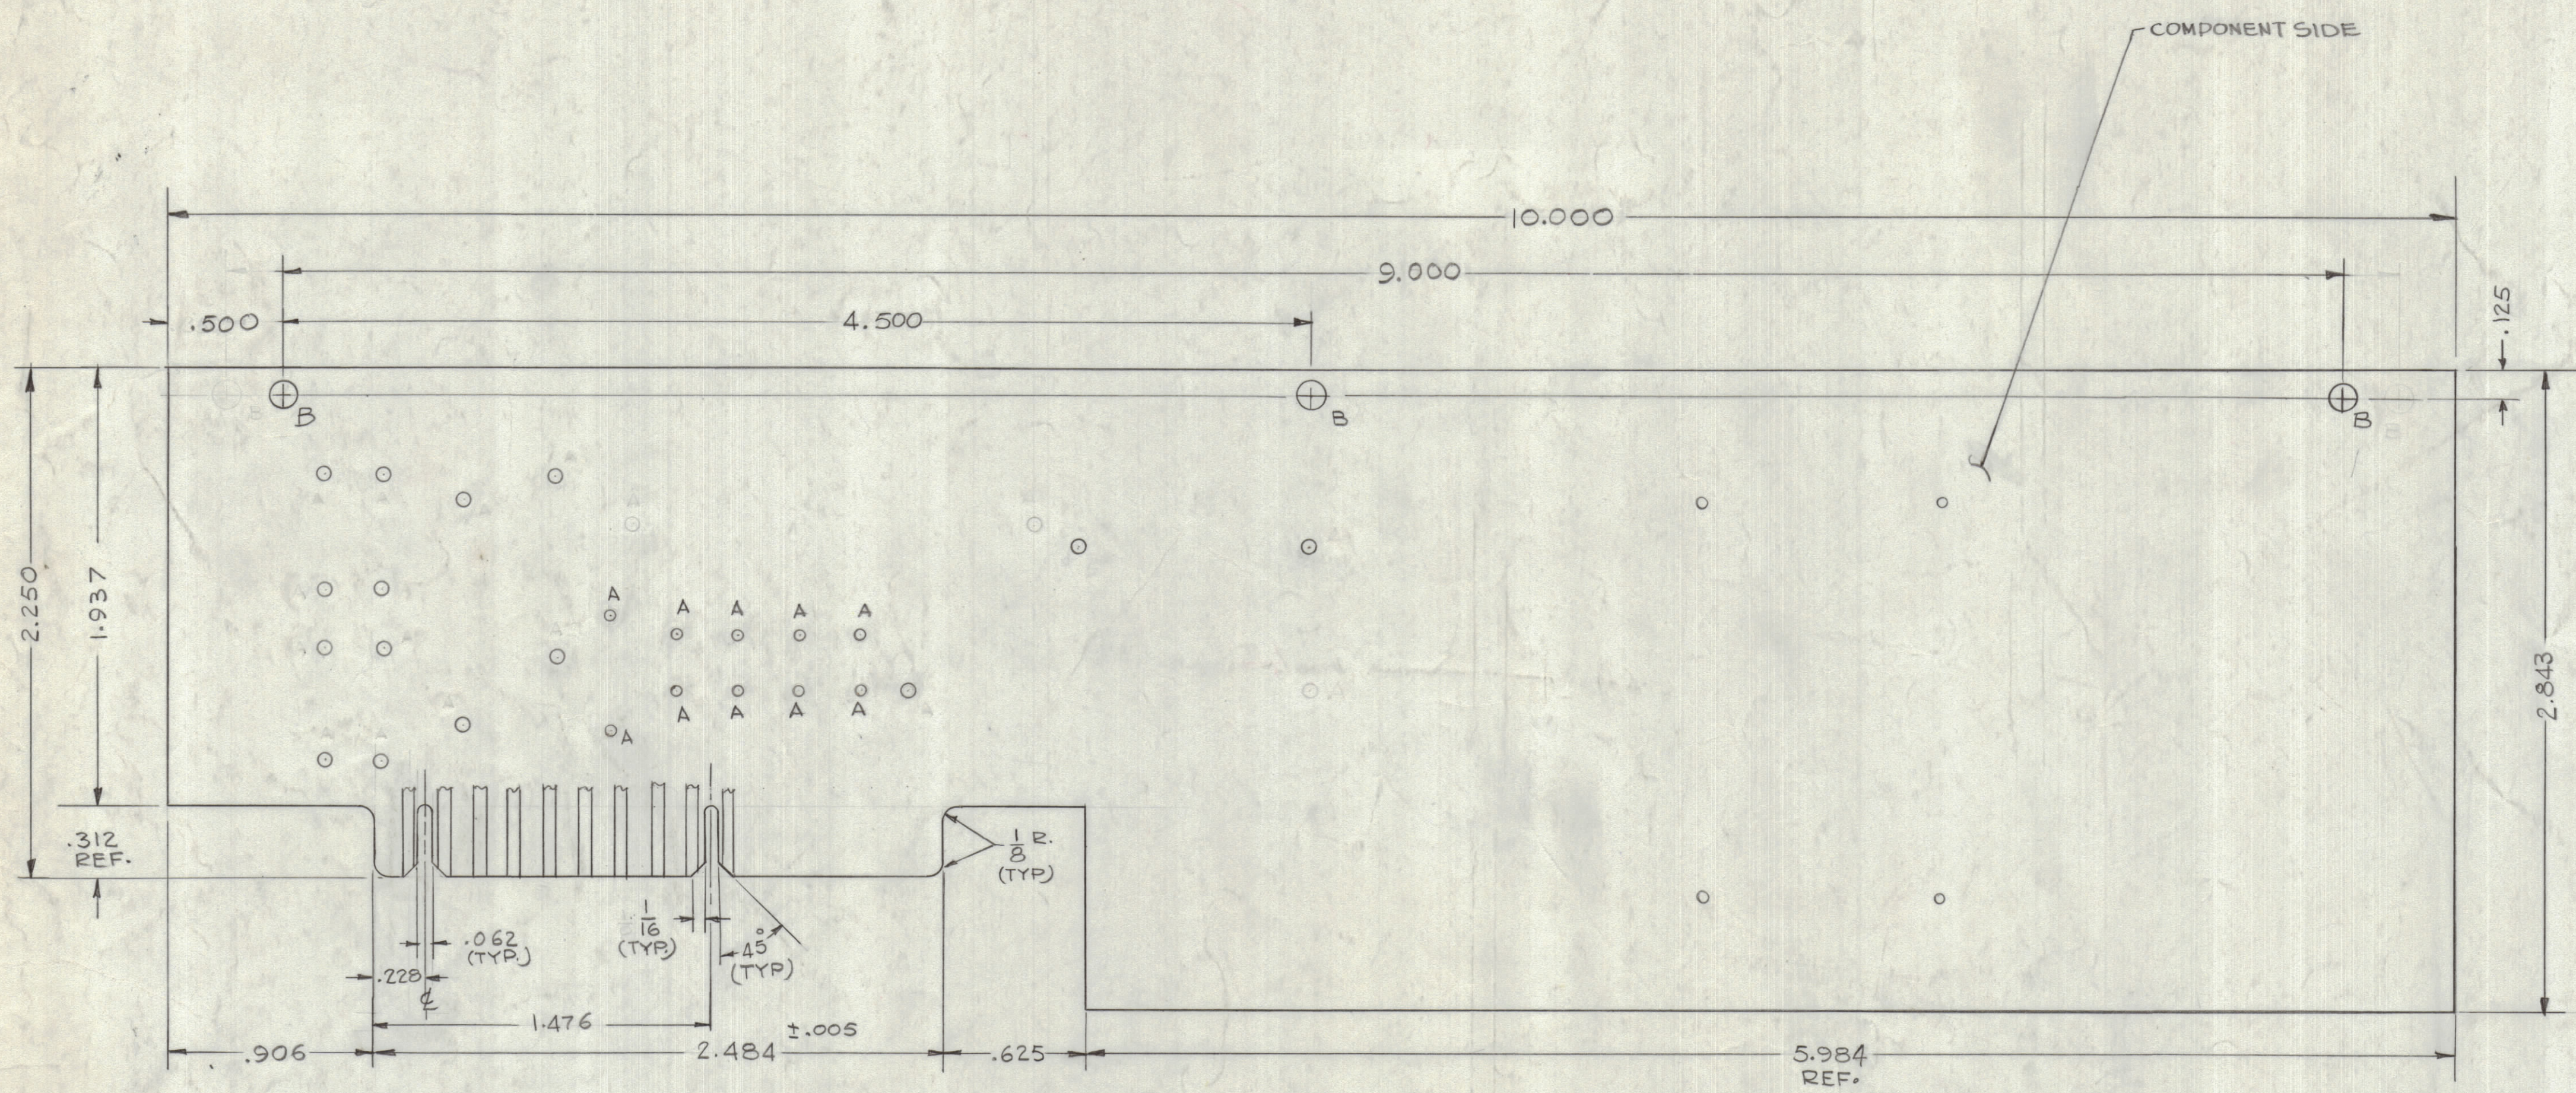

HOLE	DESCRIPTION	REQ.
A	.040 DIA.	10
B	1/8 DIA.	3
	UNMARKED HOLES .052 DIA.	18

- NOTES -
- MANUFACTURED IN ACCORDANCE WITH TMC SPEC. S-735 -
 - 1- OVER ALL MATERIAL THICKNESS .062 ±.002 AS PER (PP3.1, 3.2)
 - 2- CONDUCTIVE PATTERN TO BE COPPER FOIL AS PER (PP4.1).
 - 3- EDGE BOARD CONNECTOR FINGERS SHALL BE GOLD PLATED AS PER (PP13.2.2, 13.2.1).
 - 4- COMPONENT SIDE TO BE MARKED AS PER S-727 (FOR MARKING SEE SHEET 1 OF 2). THIS IS A SINGLE SIDED BOARD.

REC'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
			LIST OF MATERIAL P5102-1 12A100	
MATERIAL		SEE NOTES		
FINISH		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
TITLE		PRINTED CIRCUIT BOARD POWER SUPPLY		
DRAWN		G.D.L.	DATE	1/22/66
CHECKED		Ø	DATE	2/1/66
ELECT. DES.		Ø	DATE	2/3/66
MECH. DES.		Ø	DATE	2/3/66
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		TOLERANCES		
DECIMALS		FRACTIONS		
.X ± .05		± 1/64		
.XX ± .01		ANGLES		
.XXX ± .005		± 0° 30'		
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		REV. LTR.		
		PC236 A		
		SHEET 2 OF 2		
		REV. NO. 440H		