


REQ. PER UNIT	USED ON			PL-135
	MODEL	ASS'Y. NO.	DATE	

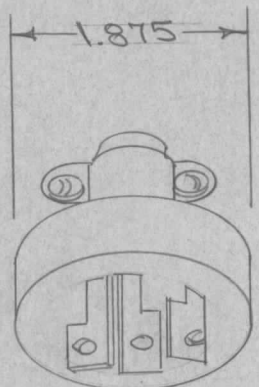

20 AMP. 250 V. AC OR DC.  
 10 AMP 600V AC.

ADJUSTABLE CORD GRIP.  
 CORD DIA. .437 TO .750

TYPE	DESCRIPTION
NG	NOT GROUNDED
WG	WITH GROUND

PL-135 - NG  
 TMC No. TYPE

(IF DESIRED GROUNDED ADD LETTER "G" TO CAT NO.)

REF. DWG. PL-134

REF: HARVEY HUBBELL INC. CAT. NO. 9965

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
										<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK, NEW YORK CONNECTOR, 3 WIRE LOCKING TYPE, POLARIZED		
									STOCK SIZE			
									MATERIAL			
										CDW	J. H. H.	S. M.
TOLERANCES			SCALE:					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES									PL-135
								FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	