

CONTACTS.	MFG #
4 PIN	UNAVAIL
4 SOCKET	126-215 W/HOOD ONLY
5 PIN	126-217
5 SOCKET	126-223
7 PIN	126-195
7 SOCKET	126-196
9 PIN	126-220
9 SOCKET	126-222

TMC PART #	REQ. PER UNIT	USED ON		
		MODEL	ASS'Y. NO.	DATE
PL-189-9-5	2	CHG		10-6-60


PL-189

### ELECTRICAL SPEC.

VOLTAGE BREAKDOWN:  
 2000V RMS 60CPS AT SEA LEVEL  
 700V RMS 60CPS AT 50,000 FT. ALTITUDE.

CURRENT RATING: 7.5 AMPS.

CONTACTS - Silver Base Plated,  
 Gold Finish

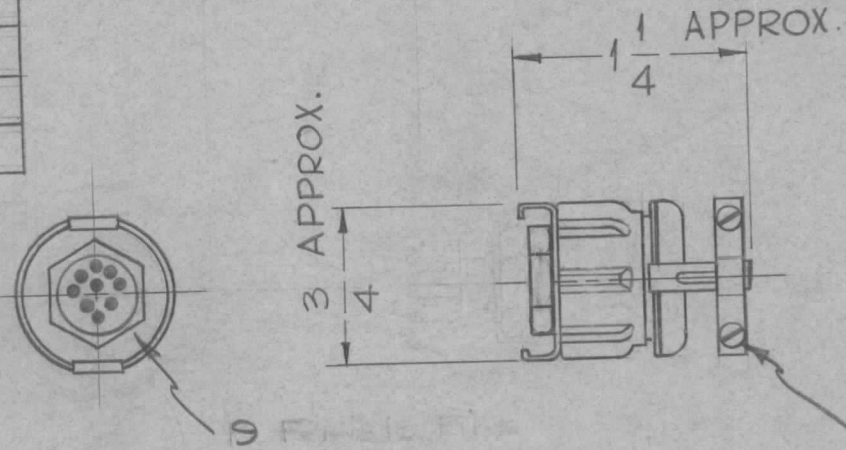

TMC PART # TO BE IN THE FOLLOWING FORM:

PL-189 - 9 - P

BASIC TMC PART NO.	NO OF CONTACTS AVAILABLE IN 4, 5, 7 & 9.	POLARITY P - MALE (PIN) S - FEMALE (SOCKET)
--------------------	--	---

NOTE - MATES WITH TMC NO. JJ-193.

							REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL		
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
									STOCK SIZE	CONNECTOR, PLUG, MINATURE HEXAGON			
									MATERIAL				
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		J.C. Biele	<i>[Signature]</i>	<i>[Signature]</i>		
TOLERANCES			SCALE: 5401-71 (126 255)						DRAWN	CHECKED	FINAL APPROVAL		
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				TYPE & TEMPER		HEATTREAT. SPEC.	<i>[Signature]</i>	<i>[Signature]</i>	PL-189	
FRAC. DIM. ± 1/64							FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP			
ANGULAR DIM. ±													