

STANDARD DRAWING


TMC PART NO.	MFRS PART NO.	"A"	"L" ±.030	SLEEVE COLOR	FINISH	WIRE SIZE
PL 242-1	42574-3	.580	.720	YELLOW	GOLD	24-22
PL 242-2	42927-3	.580	.720	BLUE	GOLD	.26
PL 242-3	42575-3	.580	.715	NATURAL	GOLD	20-18
PL 242-4	42637-3	.580	.715	BLACK	GOLD	16

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
LPP-4	CA-855	3/13/64	
	CA-856		
	CA-875		
	CA-883		
VLRB-1	CA-935	10/9/64	
VLRB-1	CA-937	10-9-64	
DDRR506		3-10-65	
TSTE10K		3-10-65	

PL-242 B

NOTES:

- 1-MATERIAL - PIN (BRASS)
SLEEVING (NYLON)
- 2-CRIMPING TOOL-MFG. P/N-90015
- 3-MAX. INSTALLED EXTENSION, SEE CHART.
- 4-USED WITH TM 126, TM128 TERMINAL BOARDS.

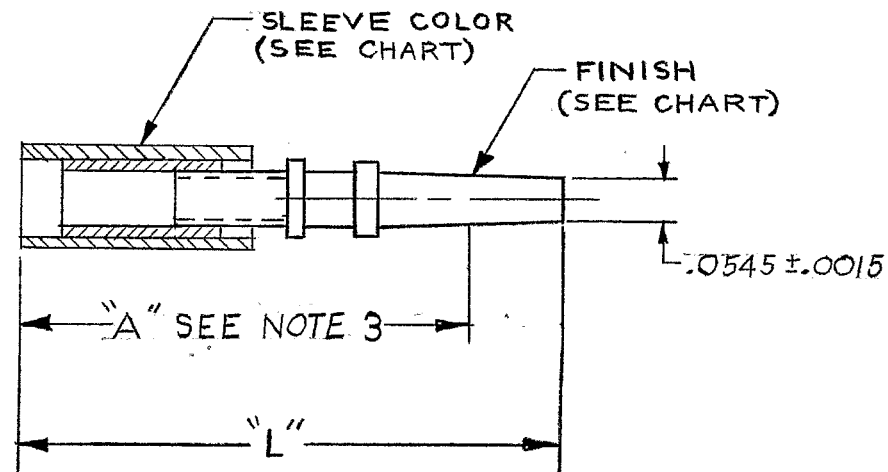

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	I. JOHNSON	DESCRIPTION	SYMBOL
B	-3, -4, & WIRE SIZE COL. ADD. TO CHART; U/O: "DDRR506" & "TSTE10K" ADD.	3-12-65	13694	2P	JOB						
A	PL 242-2 ADDED TO CHART, U/O UPDATED, ON PICT. IT4 ADDED.	10-12-64	12615	2P	JOB						
O	ORIGINAL RELEASE FOR PRODUCTION	4-10-64		A.M.	@						
X	EXPERIMENTAL RELEASE	3/25		NP	@						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE				
							MATERIAL				
							TYPE & TEMPER				
							HEAT TREAT. SPEC.				
							DRAWN		N. Peters @ 4-10-64 RJC		
							CHECKED				
							FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE C	S401-279		PL-242 B		