


PM-1016

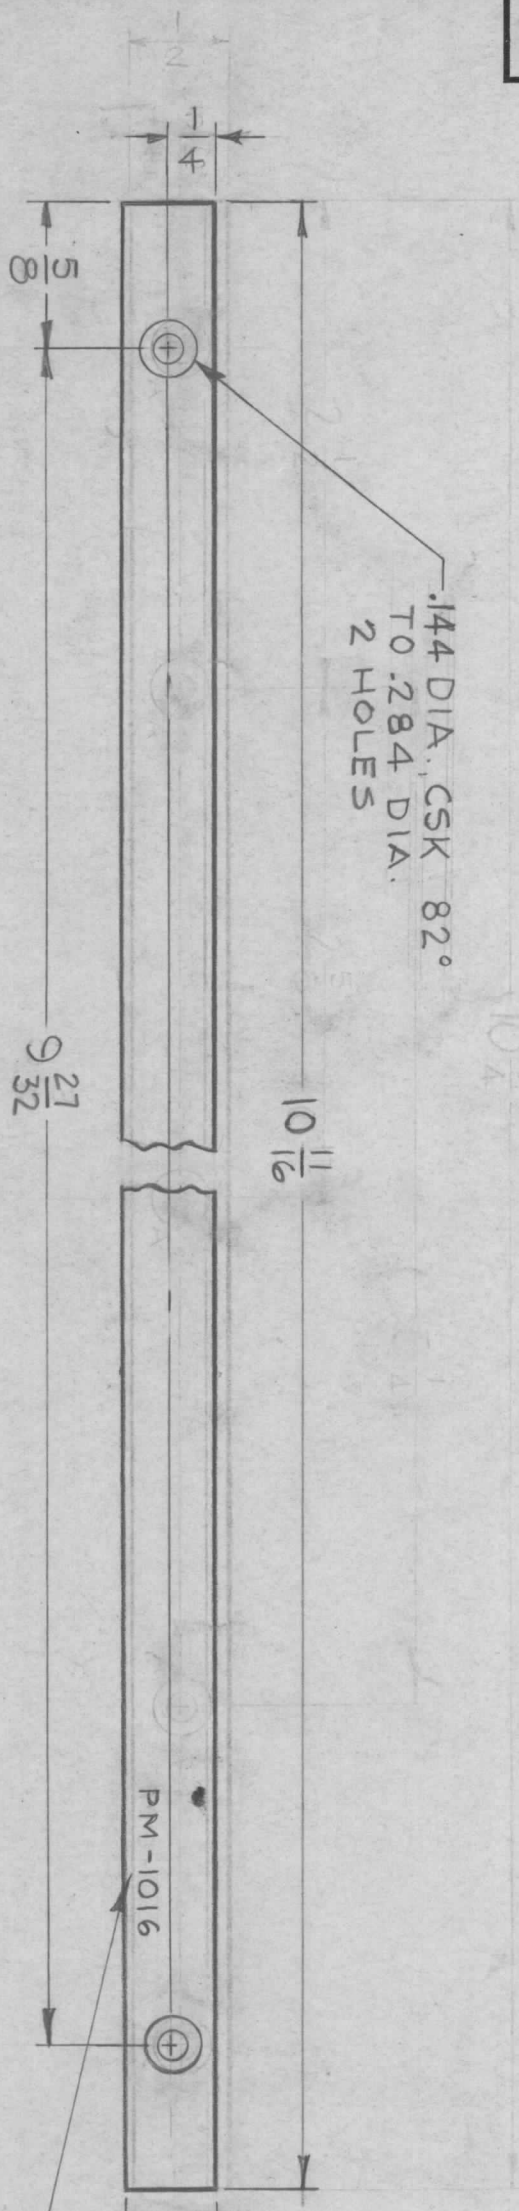

.144 DIA. CSK 82°
TO .284 DIA.
2 HOLES

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.

LEGEND	
HOLE DESCRIPTION	1/8
SEE DETAIL	5



NOTE:
REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
		SCALE:	1:1	CODE	A	
UNLESS OTHERWISE SPECIFIED:						
DIMENSIONS ARE IN INCHES						
TOLERANCES ON						
FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 1/2^\circ$						
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.						
REMOVE ALL BURRS AND SHARP EDGES						

REQ. PER UNIT	MNF - I	MODEL	SECTION	ASSY. NO.	DATE
2					4-22-63
USED ON					

REQ. ITEM	PART NO.	AALTONEN	DESCRIPTION	SYMBOL
$1/8 \times 1/2$ ROD, RECT.			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
EXTRUDED ALUMINUM RECTANGULAR ROD			GUIDE, MODULE	
MATERIAL				
6063-T5	H1			
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER	FINAL APPROVAL
5-404 IRIDITE (YELLOW)				PM-1016
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	