REQ. PER UNIT	USED ON			PM1126	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RTIA-1	A4059	1-25-65		
1	RTIA-1	A4060	1-26-65		

HOLE	DESCRIPTION	REQ
A	.221-.224 DIA	4

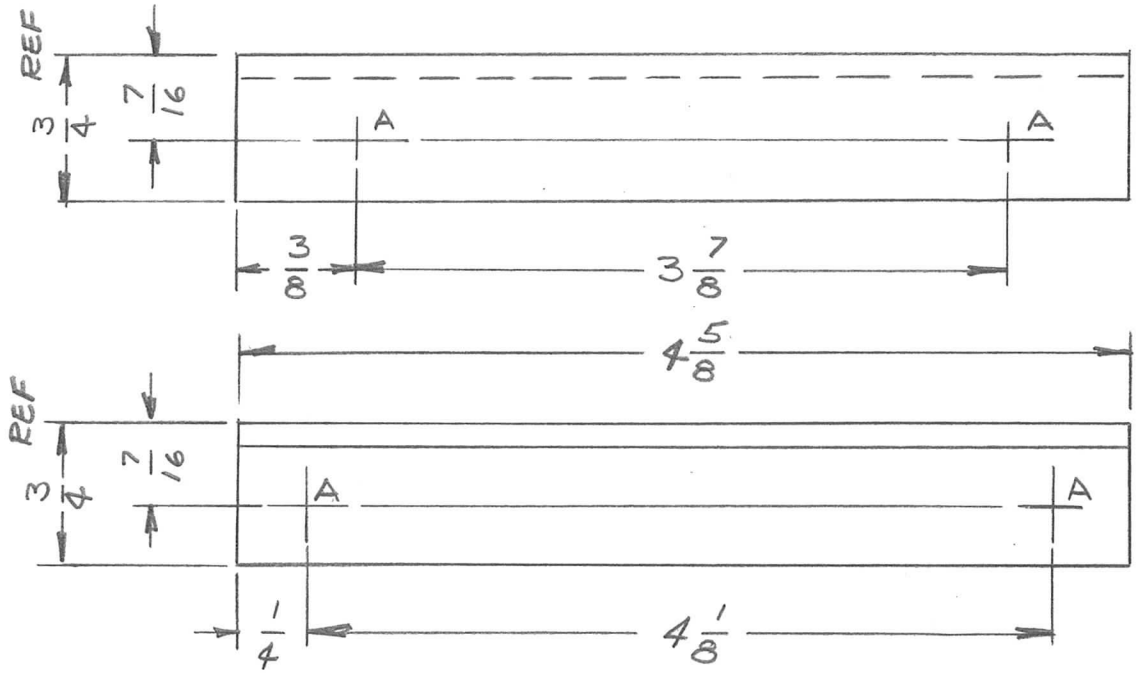

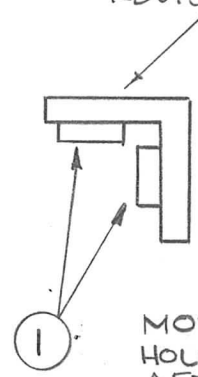

MOUNT IN ALL HOLES AS SHOWN AFTER FINISHING.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	2.8.65	Ø	JL		
X1	REDRAWN - NO CHANGES	1.25-65	X1	[illegible]	JM	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT129-832-6	NUT, PLAIN, SPLINE	A
			EATON	

EXTRUDED ANGLE 3/4 x 3/4 x 1/8 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
STOCK SIZE	BRACKET, MTG, SIDE		
ALUMINUM			
MATERIAL			
5052-H32	—	[signature]	[signature]
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
5404 YELLOW IRIDITE		F. E. Eaton 2/8/65	W. JORDAN 2/8/65
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

FINAL APPROVAL [signature]

PM1126 Ø