

STANDARD DRAWING

REQ. PER UNIT

USED ON

MODEL


ASS'Y. NO.

DATE

PM1145 B

NO. 47 (.0785) DRILL & TAP #3-48 NC-2B THD

METAL STAMP TMC PT. NO. 1/8 GOTHIC, W/LATEST REV. LETTER, ON REAR.

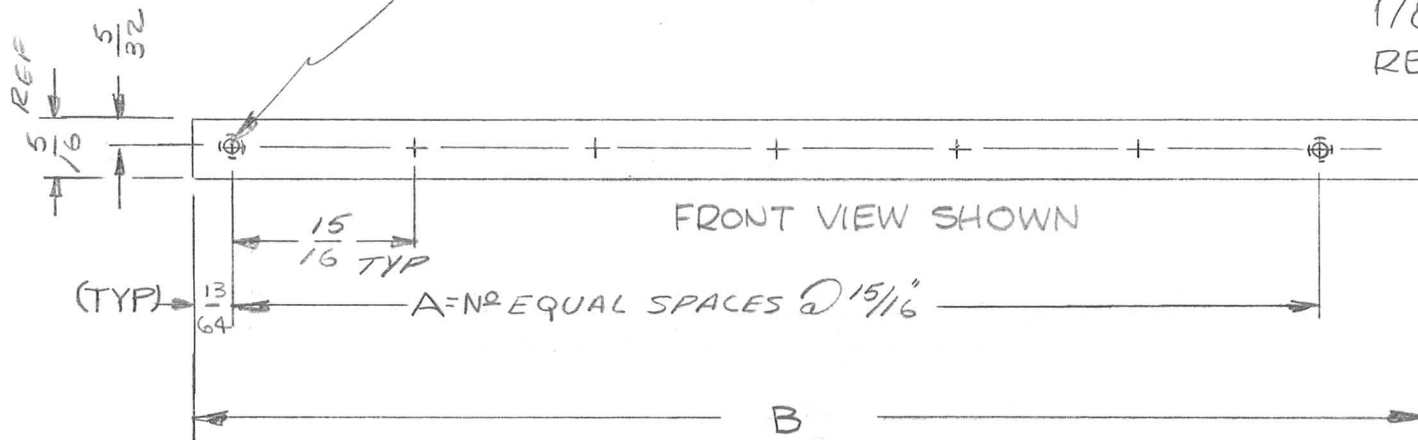

TMC PT. NO.	A	B-OVERALL LENGTH	NO. RELAY SOCKETS MTD
FM1145-1	0	3/4	1
-2	1	1 1/16	2
-3	2	2 5/8	3
-4	3	3 9/16	4
-5	4	4 1/2	5
-6	6	6 3/8	7
PM1145-7	8	8 1/4	9
PM1145-8	9	9 3/16	10

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	EATON	DESCRIPTION	SK-3071-PM9	SYMBOL			
B	PM1145-8 ADDED, -4 "B" WAS 4 9/16	6/18/65	14284	D.V.V.	JCB	X									
A	COMPLETELY REVISED	5/18/65	14095	C.V.L.	JL	JEE	5/16 WIDEX X 1/8 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK						
Ø	ORIGINAL RELEASE FOR PRODUCTION	2/10/65	Ø	JL	JCB		STOCK SIZE		BAR, MOUNTING, RELAY						
X	EXPER. RELEASE	1/26/65	X	JL	JM		MATERIAL	BRASS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		4			1/2 HARD		JL	JM	JCB	JL			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		TYPE & TEMPER CADMIUM PLATE S105		HEAT TREAT. SPEC.		DRAWN JEE 2/8/65		CHECKED W. JORDAN 2/8/65		FINAL APPROVAL PM1145 B	
TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.					