
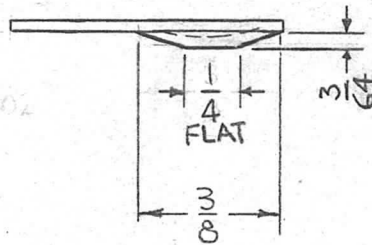


TMC P/N	A	B	C DIA	±.002 THK	MATERIAL	FINISH	REQ. PER UNIT	USED ON			PM1210	E	
								MODEL	ASS'Y. NO.	DATE			
PM1210-1	3/8	5/32	5/32	.025	↑ BERYLLIUM COPPER ↓	↑ S245 SILVER PLATE S423 SILVER KOTE ↓		2					
PM1210-2	5/8	7/32	3/16	.025									
PM1210-3	1"	5/32	5/32	.025									
PM1210-4	1/2	5/32	5/32	.015									
PM1210-5	13/16	5/32	5/32	.015									
PM1210-6	1 1/4	5/32	5/32	.025									

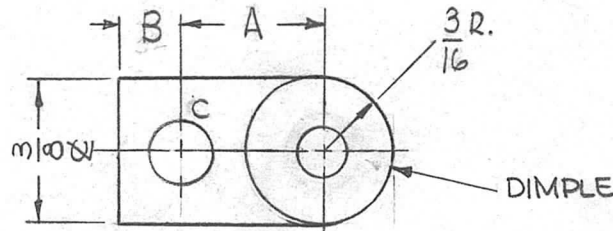

NOTE 1 (HEAT TREATMENT)  
600°F. FOR 2 HOURS IN  
CLOSED OVEN BEFORE  
PLATING.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
E	ADD HEAT NOTE	4.6.72	20581	GE	EP	EP					
D	ADDED PM1210-6	10.23.69	19608	KD							
C	PM1210-5 ADDED	5.27.69	19459	GE	HD	FB					
B	ADDED THK MAT'L & FINISH COLUMNS	2.15.68	18767			FB		SEE CHART		<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK. NEW YORK <b>SPRING, LEAF WIPER</b>	
A	CHANGE THICKNESS FROM .040 TO .025 & ADIM. 9/8 TO 1/2							SEE CHART			
A	ADDED PM1210-4, DELE. RFTA-1 REQ & LPFS-1 REQ COL	8.1.66	16685	RME	QC			SEE CHART			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 2:1					FULLY HARD SEE NOTE 1		SRG 12-14-64	QC	M/May 5/20/64
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A	SEE CHART				
						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	PM1210	E