REQ. PER UNIT	USED ON			PM1301	Ø
	MODEL	ASS'Y. NO.	DATE		
2	TOC-7		5-4-66		

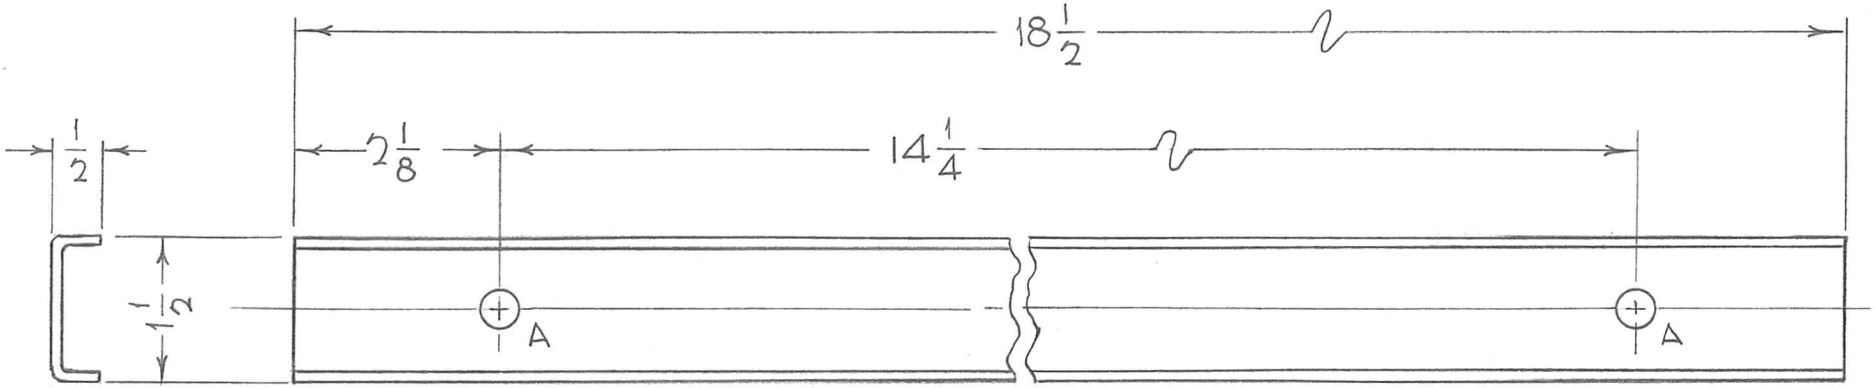

HOLES	REQ.
A- 3/8 DIA.	2

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	5/11/66	Ø			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1/2" = 1"

DECIMALS .X ±.05 .XX ± .01 .XXX ±.005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30′

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

1-1/2 X 1/2 X 1/8 THICK
STOCK SIZE

ALUMINUM, EXTRUDED
MATERIAL

6063-T5 | TYPE & TEMPER | HEAT TREAT. SPEC.

S404-IRIDITE, 14-2 AL-COAT
FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

STIFFENER, CASE

DRAWN	CHECKED	FINAL APPROVAL
J.C.	5/11/66	

ELEC. DES. APP.	MECH. DES. APP.	
	5-11-66	PM1301 Ø