


TMC PART NO.	DIMENSION "A"	USED ON	ASSY NO.	QTY	REQ. PER UNIT	USED ON			PM1325	C
						MODEL	ASS'Y. NO.	DATE		
PM1325-	.395 \pm .005 - .000	TLAA 2.5K	AS128	7						
PM1325-2	.281 \pm .005 - .000	TLAA-1K	AS160	8						

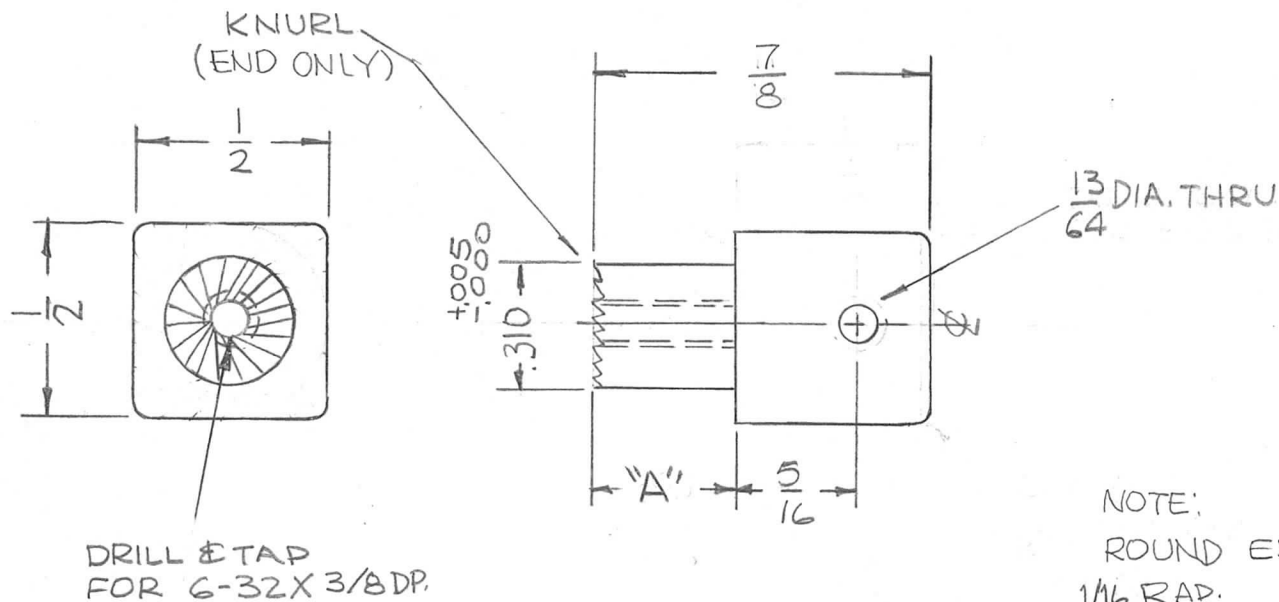

C	CHART ADDED-DIM A WAS .395	4-27-76	21360	GDL	CL	CL						
B	1/2 DIM DELE; .395 WAS .375	5-11-67	18209	LHD	FB	FB						
A	CHG'D RADIUS FR 1/8 TO 1/16	12-1-66	17362	RME	QCB	QCB	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/17/66	Ø	CV			AS SHOWN		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X ₁	7/8 WAS 11/16	8-31-66	X ₁				STOCK SIZE		CONTACT, ELECTRICAL			
X	COMPLETELY REVISED & REDRAWN	8-23-66	X	SRG	QCB	QCB	ALUMINUM					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		2:1			2024-T4		QCB	QCB	QCB	
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		TOLERANCES		CODE A	TYPE & TEMPER S245 SILVER PLATE S423 SILVER KOTE		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	PM1325 C	