

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


PM-341 C

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			
	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
2	GPR	297		2-16-55

SCREW DRIVER SLOT

A-40 THD. CL. 2

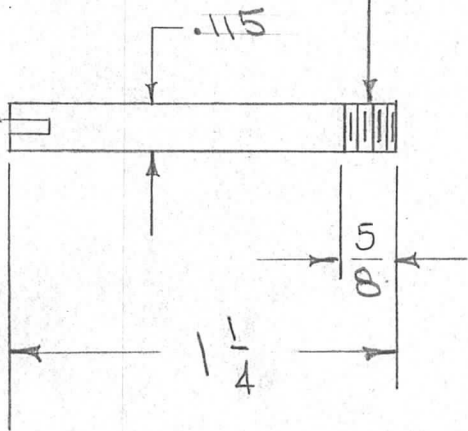

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
C	1 1/2	5/8 WAS 1/2	7/25/58	411	aka		
B	1	FINISH ADDED	9/12/55	2	jak	CDD	WR
A	1	1 1/4 WAS 1"	7/19/55	1	CDD	jak	WR

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	# 32 (.115)		THE TECHNICAL MATERIEL CORP.	
	STEEL	— # —	MAMARONECK. NEW YORK	
	DRILL ROD		PIN, DIAL LOCK	
			G.P.R.	
			CDD. 3-16-55	WR
			DRAWN	ELEC. DES. APP. MECH. DES. APP.
			CHECKED	G.T.O.
			HEAT TREAT. SPEC.	FINAL APPROVAL
			CADMIUM PLATED .0002	
			FINISH & SPEC. NO.	PM-341 C

TOLERANCES		SCALE
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.