REQ. PER UNIT	USED ON			PM-399
	MODEL	ASS'Y. NO.	DATE	
1	RTF		2-6-56	

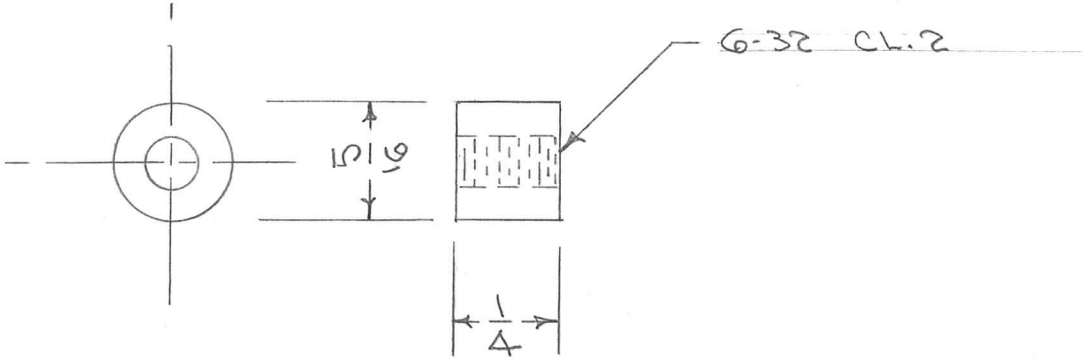

NOTE
USED ONLY ON RTF SERIAL NOS
100 – 114 INCLUSIVE

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		5/16 D. ROD	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE	SPRING GUIDE	
		ALUMINUM	POW/AMP	
		MATERIAL		

17S T4		CDD 2/6/56	[illegible]	[illegible]
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S-101 CAUSTIC DIP S-104 LACQUER			2/6/56	PM-399
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	