


REQ. PER UNIT	E-494-P USED ON		PM-403	C
	MODEL	ASS'Y. NO.		
1		A-1237	2/13/56	

A - 5/16 D. - 4 HOLES  
 B - DRILL & TAP 1/4-20 - 4 HOLES  
 C - 1-1/4 DIA. - 1 HOLE

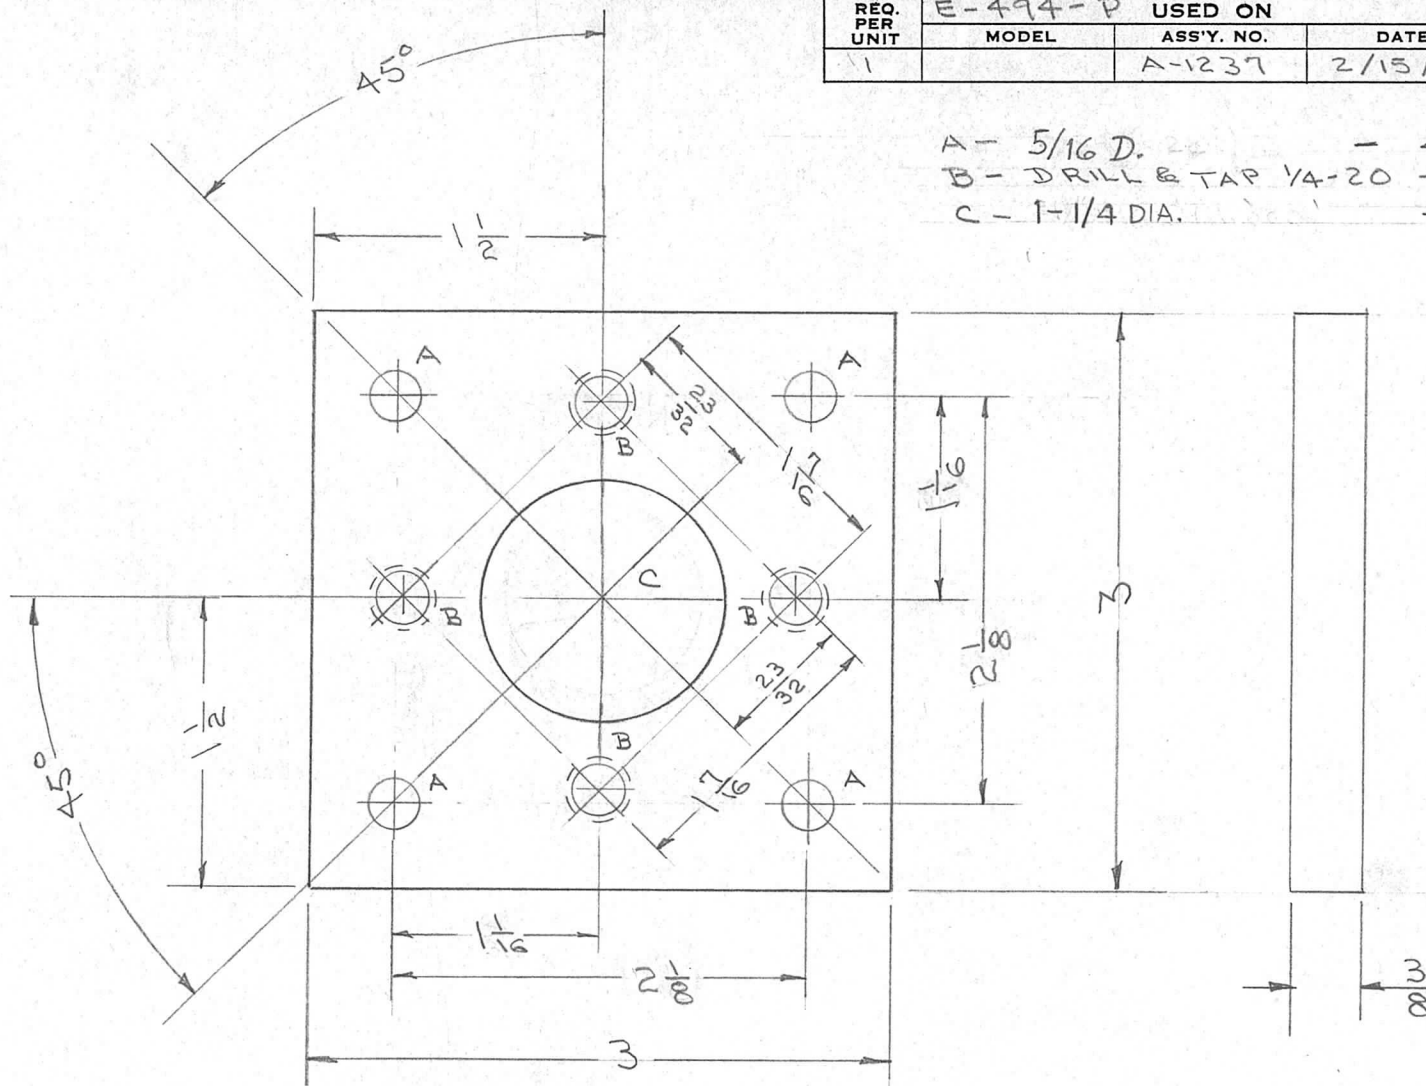

REF: UG-352/U

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL														
C 1	FINISH & SPEC WAS S-101 CAUSTIC DIP, S101 LACQUER	8-17-62 7076 G.S. Jde 16	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK														
B 1	C WAS 1" DIA.	2-2-62 6273 EL															
A 1	"A" HOLE DIA. WERE 9/32	1-17-61 3934 MAE JCB															
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL		SYMBOL							
TOLERANCES		SCALE: FULL SIZE						245-T4		JAD		A.J.J.					
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
FRAC. DIM. ± 1/64								S-404-YELLOW IRIDITE						WJL		PM-403	
ANGULAR DIM. ±								FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.					