

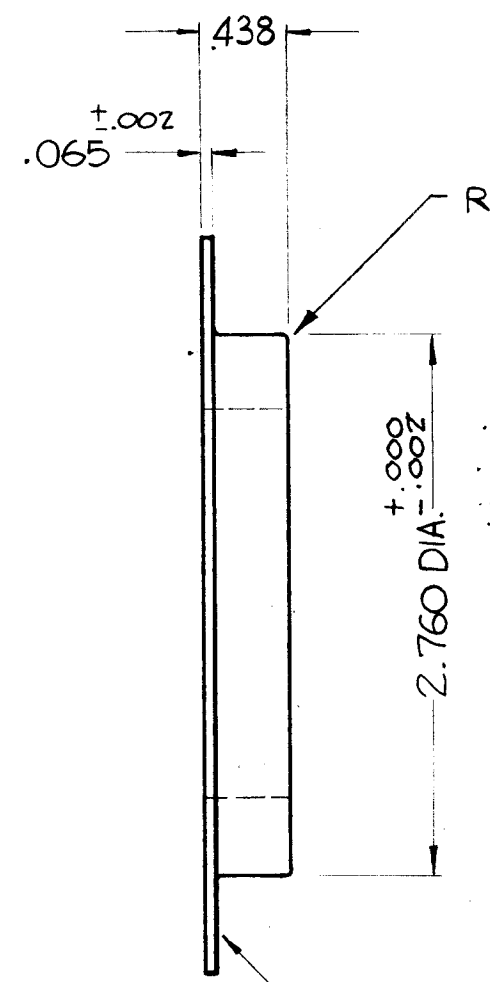


PM-701 A

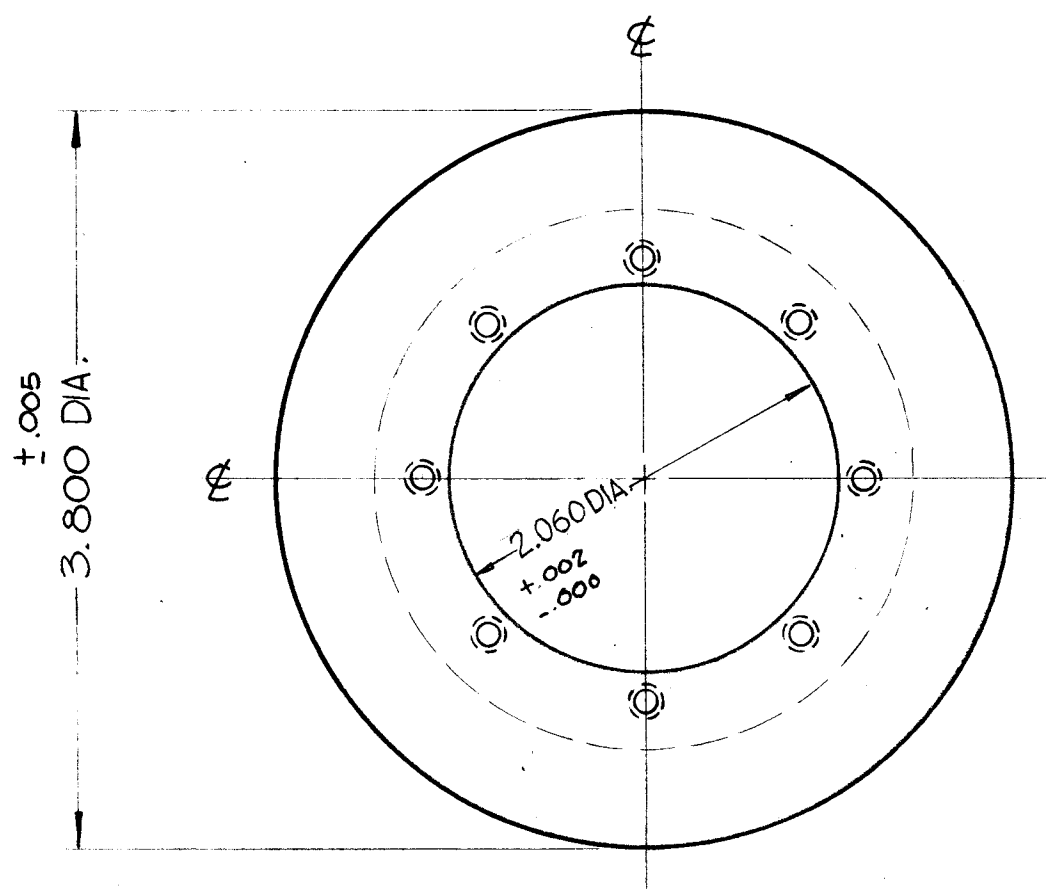

HOLES ———  
A- DRILL & TAP 8-32 THRU ——— 8 REQ.

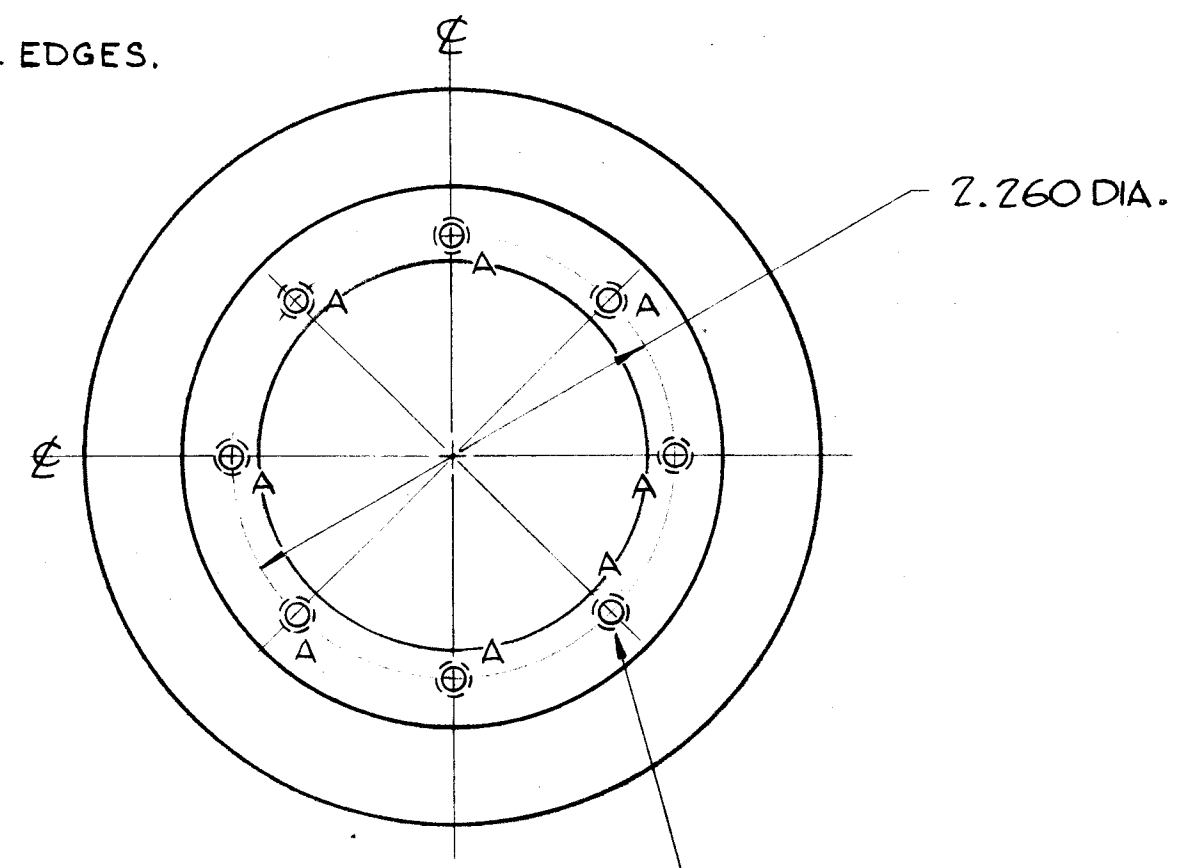

CLASS 16 FINISH (POLISHED).

ⓐ "A" HOLES EQUALLY SPACED 45° APART ON A 2.260 DIA. AS SHOWN.

NOTE - ALL DIMENSIONS APPLY AFTER PLATING.

FINISHING NOTES ———  
S-245 SILVER PLATE, BRIGHT.  
S-423 IRIDITE, 18-P SILVER-KOTE.

A	DIM. 2.060 DIA. WAS 2.010 DIA.	11-21-61	5953	GDL	DNW	[Signature]
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE: — DO NOT SCALE —				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64		REMOVE ALL BURRS AND SHARP EDGES				
DECIMALS ± .005						
ANGLES ± 1/2°						

1	GPT-40K	AX-268		6-22-61	
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE	
USED ON					

REQ. ITEM	PART NO.	DESCRIPTION		SYMBOL
.065		THE TECHNICAL MATERIEL CORP.		
STOCK SIZE		MAMARONECK, NEW YORK		
BRASS		RETAINER, SPRING & CONTACT BANDSWITCH		
MATERIAL				
HALF HARD		John C. Biele	W.A.F.	ZB/rb
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER	FINAL APPROVAL
SEE NOTE				
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	PM-701 A