

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

USED ON

MODEL
HFR-1/T


ASS'Y. NO.
A-3042

DATE
7-5-62


PM-767

C

TMC PART NO	A	B	REQ	H
PM-767-1	.453	.130	1	.2500 ^{+0.0003} _{-.0000}
PM-767-2	.437	.187	1	NONE REQ
PM-767-3	.375	.130	1	.2500 ^{+0.0005} _{-.0000}

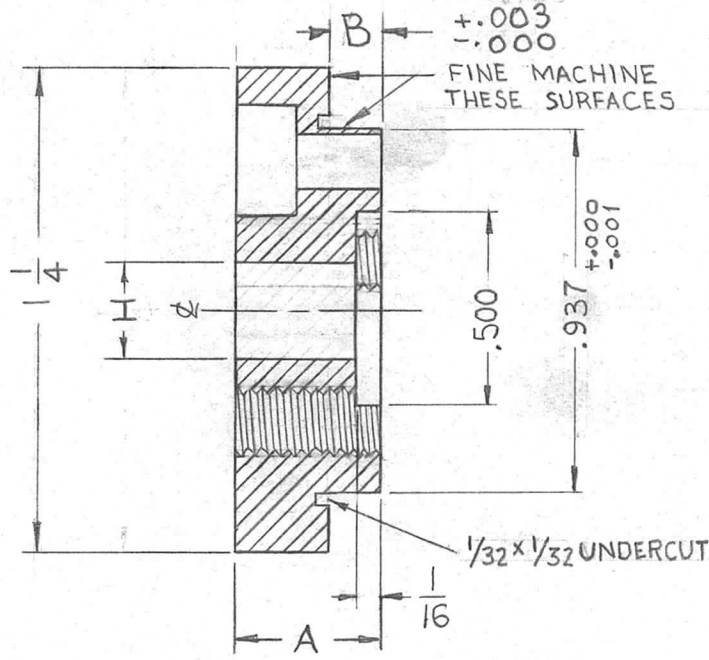

SECTION A-A

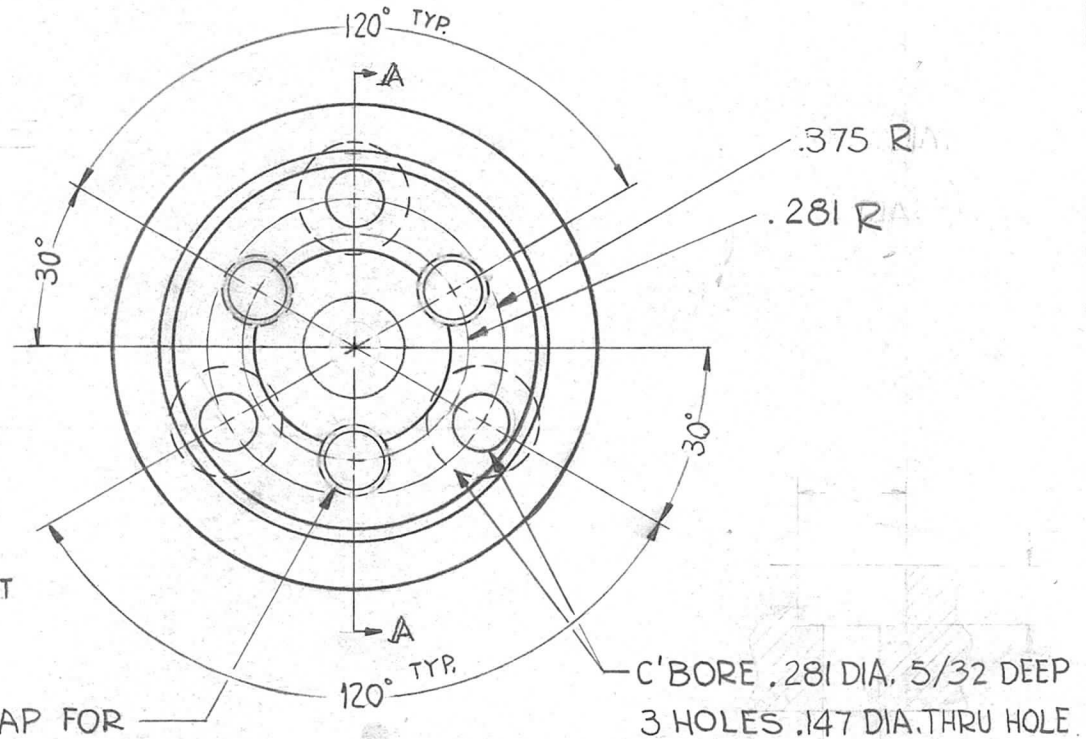

DRILL & TAP FOR 8-32 SCREW-3HOLES

STANDARD DRAWING

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
C	PM767-3 ADD; STD. DWG, STAMP AD	2-11-65 13442	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
B	ON PICT. "H" HOLE ADD. NOTES: FINE MACHINE... & ... UNDERCUT ADD.	10-22-64 12744	HUB, BAND SWITCH GEAR			
A	ON CHART, PM-767-1 DIM "A" WAS .375	11-8-62 7639	STAINLESS STEEL			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°		SCALE: Do Not Scale		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		
		#303	TYPE & TEMPER		HEATTREAT. SPEC.	DRAWN
		S104 PASSIVATE				CHECKED
			FINISH & SPEC. NO.			FINAL APPROVAL
						PM-767 C