REQ. PER UNIT	USED ON			PX-398	B
	MODEL	ASS'Y. NO.	DATE		
1	ATS-( ) TU		2-17-58		

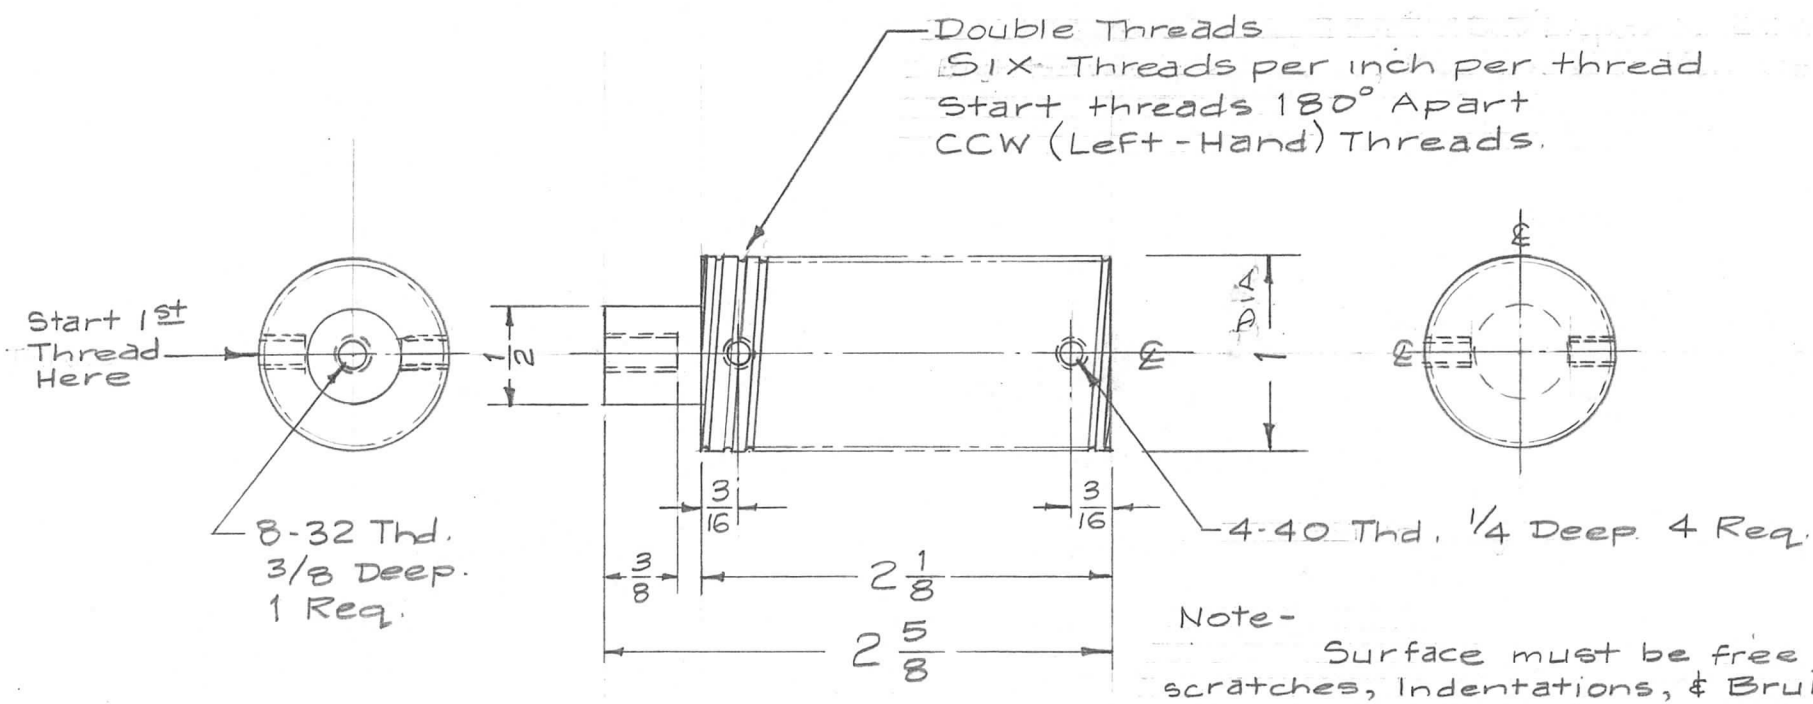

Note-
Surface must be free from scratches, Indentations, & Bruises. Do not use Abrasives or Solvents on the surface. Wrap piece in soft paper after machining.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	SIX Thds per inch WAS EIGHT Thds per inch	3/31/58	2	16		
A	1	Threading Info Clarified & Note Added	2/27/58	1	16		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/16
ANGULAR DIM. ±

SCALE: Full

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		1" O.D.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
		Polystyrene	FORM, HUMIDITY ELEMENT	
		MATERIAL		

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
Natural		16 2/17/58		PX-398 B
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	