


PX-620 B

A- $\frac{13}{32}$ DIA 1 REQ
 B-.199 DIA 8 REQ

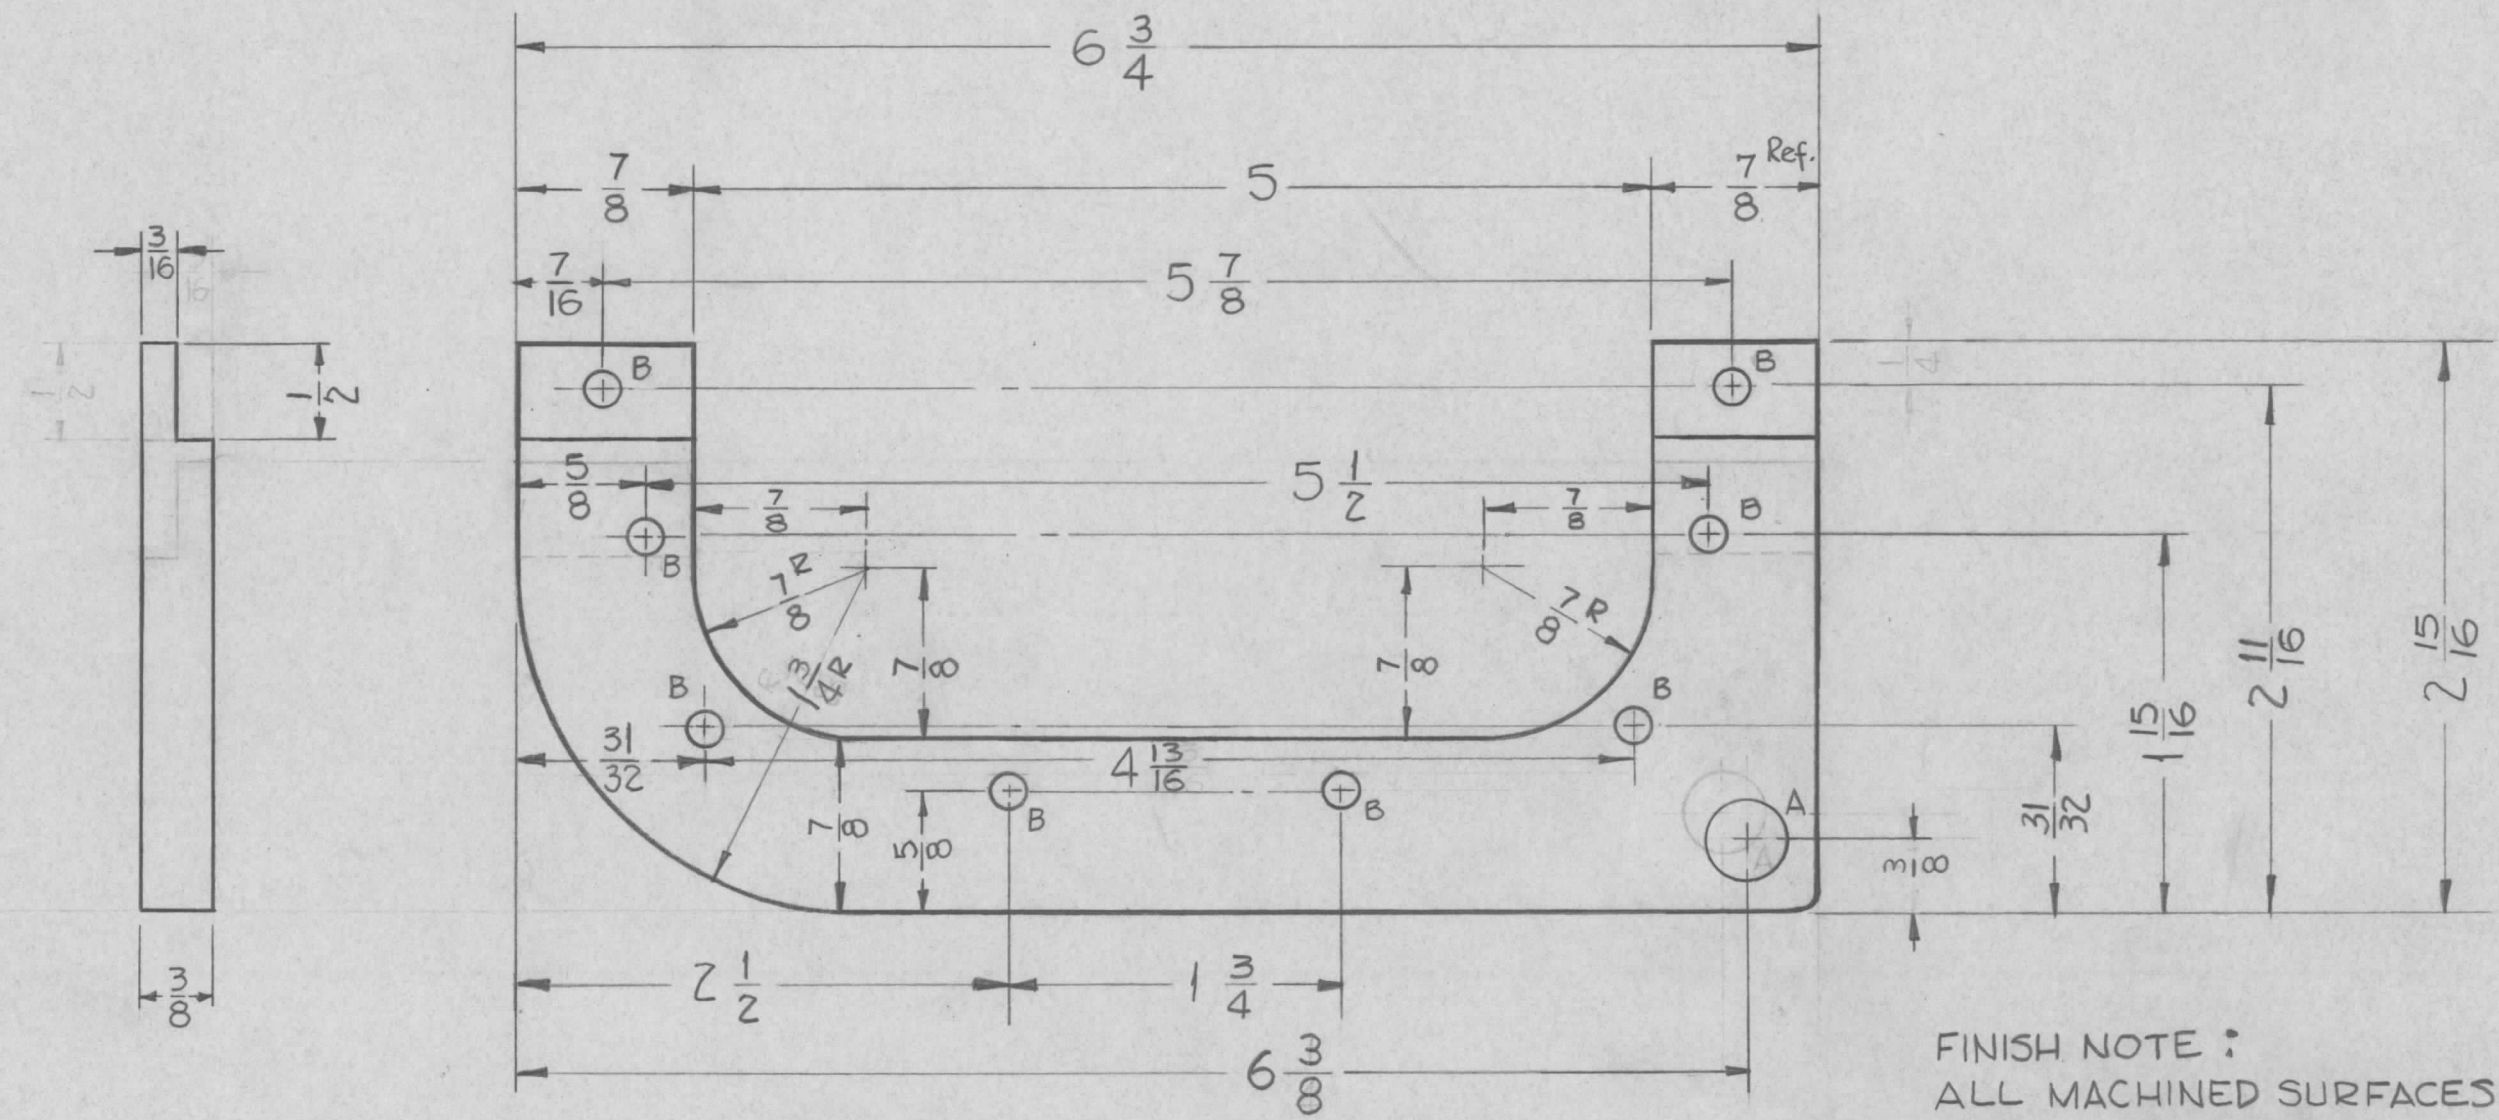

FINISH NOTE :
 ALL MACHINED SURFACES
 TO BE COATED WITH GL-104-2
 AND BAKED AT 250°F FOR
 1 HOUR.

REF.

B	ON FINISH NOTE: COATED WITH, WAS Q85	8.864	12051	WJB	7/10	OK
A	6-3/8 Dim. Was 6-1/4; 3/8 Dim. Was 1/2 B Holes Were .193 Dia, Note Revised	11-30-61	5981	E. G.	OK	OK
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE:				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 1/2^\circ$		REMOVE ALL BURRS AND SHARP EDGES				

4	TRC-20 K	9-22-61
REQ. PER UNIT	MODEL	DATE
USED ON		

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	3/8	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	SILICON GLASS	RING, CAGE, STUD MTG.	
	G7	RUIZZO	OK
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER
SEE NOTE		Redw	IB
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	FINAL APPROVAL
			PX-620 B