APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RTTD-4		X	EXPERIMENTAL RELEASE	6/18/68		C.V.		
			Ø	ORIG. RELEASE FOR PROD	11-21-68	Ø	R.G.		

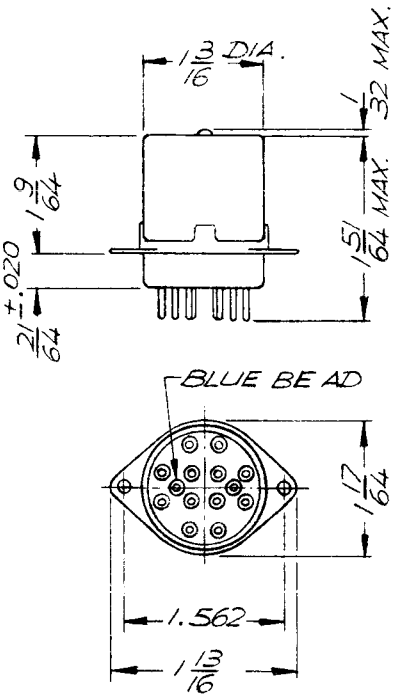

MFGR (TMC CODE NO·): S401-227

[redacted]

DC NOMINAL COIL DATA
- VOLTS: 26.5
- AMPS: .132
- OHMS: 200

CONTACT ARRANGEMENT: 4 POLE DOUBLE THROW

AMBIENT TEMPERATURE: -65°C TO +125°C

ENCLOSURE: HERMETICALLY SEALED

MOUNTING .125 DIA. HOLES (2)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005 TOLS. FRACTIONS 1/64 ANGLES 0° 30'

MATERIAL

FINISH

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
S. DE MARCO			LIST OF MATERIAL	

FINAL APPROVAL	S. DeMarco	DATE 11/20/68
MECH. DES.		DATE 11/20/68
ELECT. DES.		DATE
CHECKED		DATE
DRAWN		DATE 11/19/68

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

RELAY, ARM. DC, 4 PDT

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from **THE TECHNICAL MATERIEL CORPORATION** to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	RL 182	Ø

SCALE | SHEET OF