

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

RR-100 B

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES


USED ON

MODEL

PROJECT NO.

ASS'Y. NO.

DATE

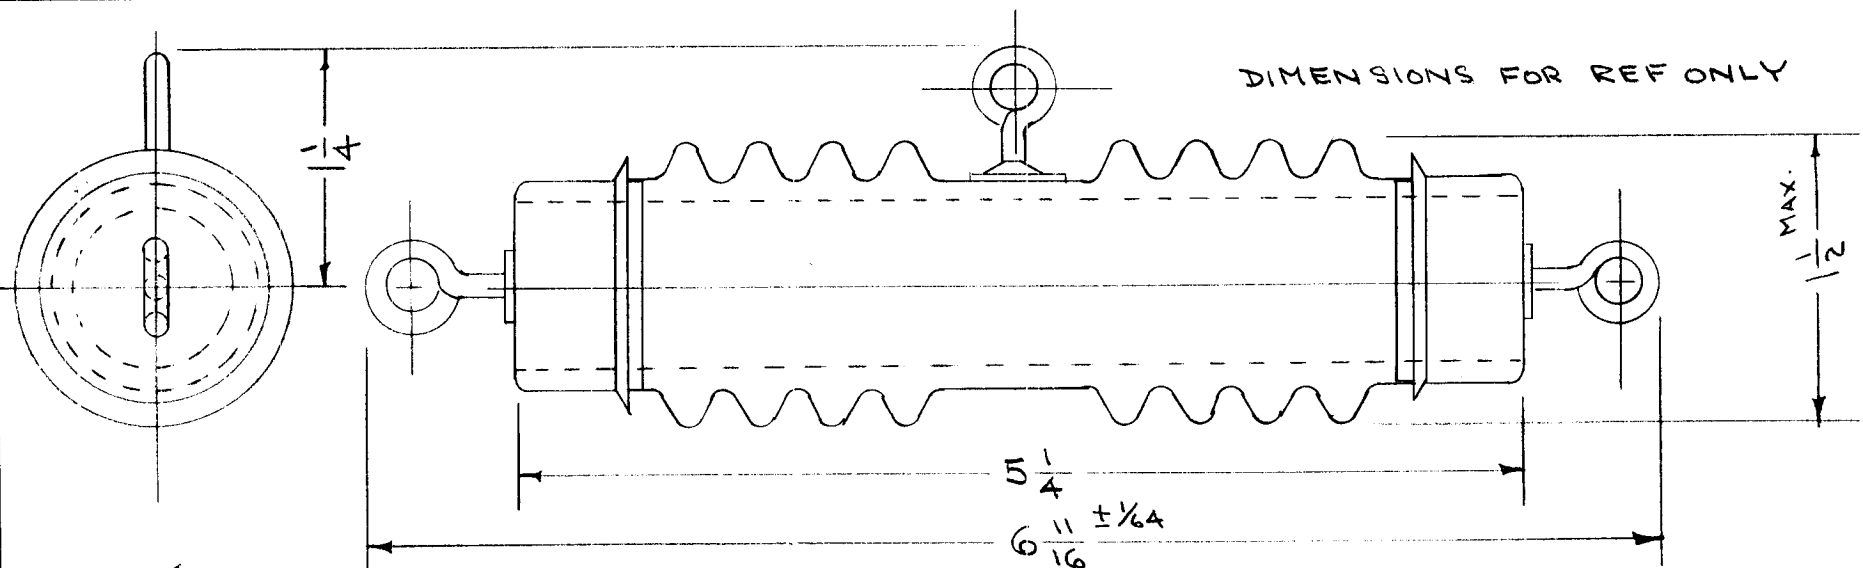

TMC NO.	CAT. NO.	RESISTANCE OHMS
RR-100-1		725 ± 5%

HERMETICALLY SEALED WITH SLIGHT DRY VACUUM. GLAZED CERAMIC ENVELOPE. NON INDUCTIVE WIRE WOUND RESISTOR. TERMINALS PERMIT CONNECTION OF 7 STRAND #16 ANTENNA WIRE. OPERATING TEMPERATURE RANGE -20° F TO +120° F.

REF: SHALLCROSS MFG. CO.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	#		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	#		RHOMBIC ANTENNA	
	#		TERMINATING RESISTOR	
	#		CDD. 2-12-54	UPC
	#		DRAWN	ELEC. DES. APP.
	#		CHECKED	MECH. DES. APP.
	#		HEAT TREAT. SPEC.	FINAL APPROVAL
	#		FINISH & SPEC. NO.	RR-100 B

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
		REDRAWN - NO CHANGE					

TOLERANCES	SCALE
ALL OTHERS DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.