IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWIN NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

RR-113

REQ. PER UNIT	USED ON			
	MODEL	PROJECT NO.	ASS'Y. NO.	DATE

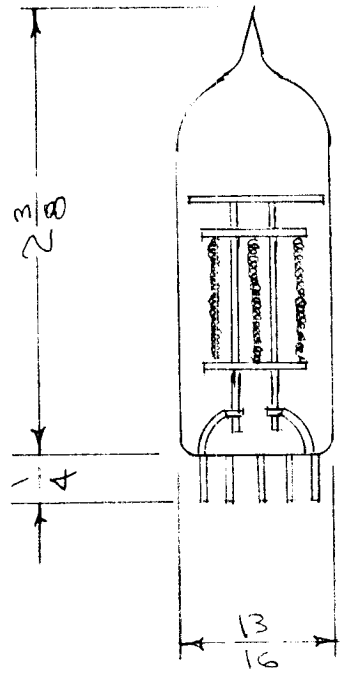

12V SUPPLY VARIATION 10.8 TO 13.2 V
DESIRED ON TUBES 6.2 TO 6.6 V
REQUIRED ON AMPERITE 4.6 TO 6.6 V
CURRENT 0.74 TO 0.82 A
BULB T6 1/2
BASE 9 PIN NOVAL
BASE WIRING - PRONGS 2-7

DIMENSIONS FOR REFERENCE ONLY

REF: AMPERITE CO. BALLAST TUBE 7HTF4

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL | WEIGHT PER PC.

TYPE & TEMPER

HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TUBE, BALLAST

DRAWN	ELEC. DES. APP.	MECH. DES. APP.
CBB 7-27-55	K2	
CHECKED	FINAL APPROVAL	
	A.J.I.	

RR-113

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

ALL OTHERS
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

FORM — 108