


REQ. PER UNIT	USED ON		
	MODEL	ASSY. NO.	DATE
1	5WR-3000 CU		6-4-54

RR-124 C

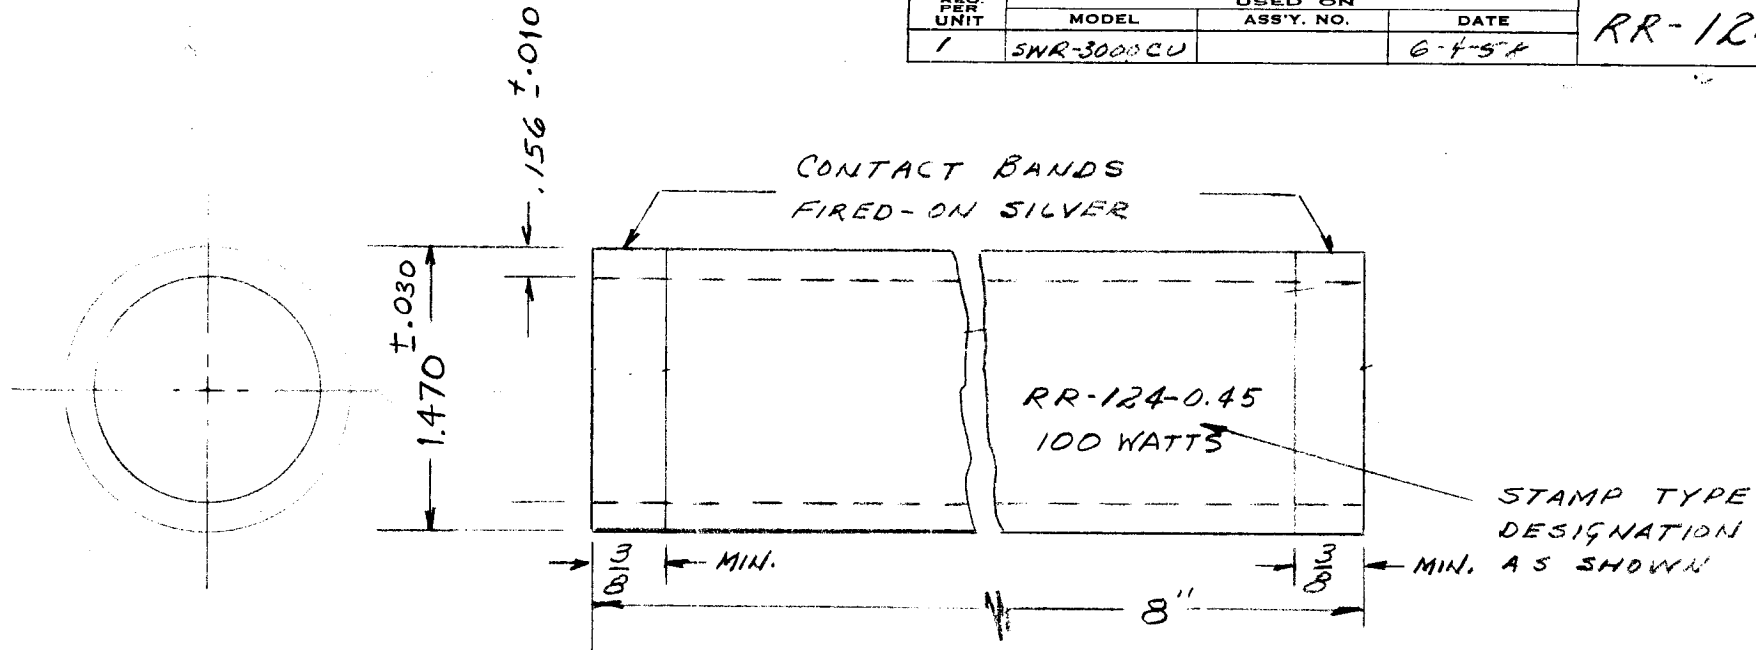

MATERIAL - CARBON DEPOSIT
ON GLASS FORM
RESISTANCE - 0.45 OHMS +10%-20%
GLASS FORM - PYREX GLASS

TYPE DESIGNATION TO BE IN FOLLOWING FORM

RR - 124 - 0.45
 TMC DWG. NO. OHMS

REF- FILM OHH

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
C 1	Frac. Dim was 1/64	3-1-61 4287 RU	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK RESISTOR, FIXED, 100 WATTS
B 2	DIM. .156 ±.010 WAS .156 ±.010 ±.005	2-11-61 A143 M.A.F.	
A 1	DIM. 1.470 ±.030 WAS 1.4375 ±.005 Solder spots Deleted	8/21/58 431 16	
ISSUE ITEM	CHANGED FROM	DATE CH. NO. DRAFTS CHECKER ENG. APP.	MATERIAL
TOLERANCES		SCALE: FULL	TYPE & TEMPER HEAT TREAT. SPEC.
DEC. DIM. ± FRAC. DIM. ± 1/16 ANGULAR DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES	DRAWN CHECKED FINAL APPROVAL ELEC. DES. APP. MECH. DES. APP.
			RR-124 C