


REQ. PER UNIT	USED ON			RR-125
	MODEL	ASS'Y. NO.	DATE	
1	A-1532/PVC		7-29-58	

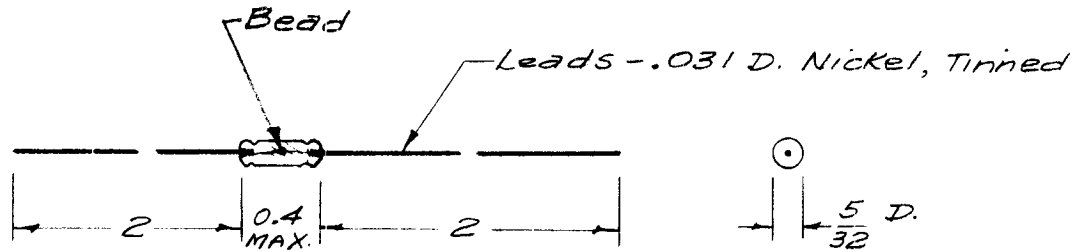

Glass Coated Bead in Glass Envelope  
RESISTANCE at 25°C. - 2000 ohms ± 25%

Ref-Victory Engineering Corp. (VECO) No. 32A3

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
										<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK. NEW YORK RESISTOR, THERMAL					
									STOCK SIZE						
									MATERIAL						
TOLERANCES			SCALE: FULL							16/29/58	JHE	JSR			
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPR VAL			
FRAC. DIM. ±															
ANGULAR DIM. ±															
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	RR-125				