


STANDARD DRAWING

REQ. PER UNIT	USED ON			RY-121-	D
	MODEL	ASS'Y. NO.	DATE		

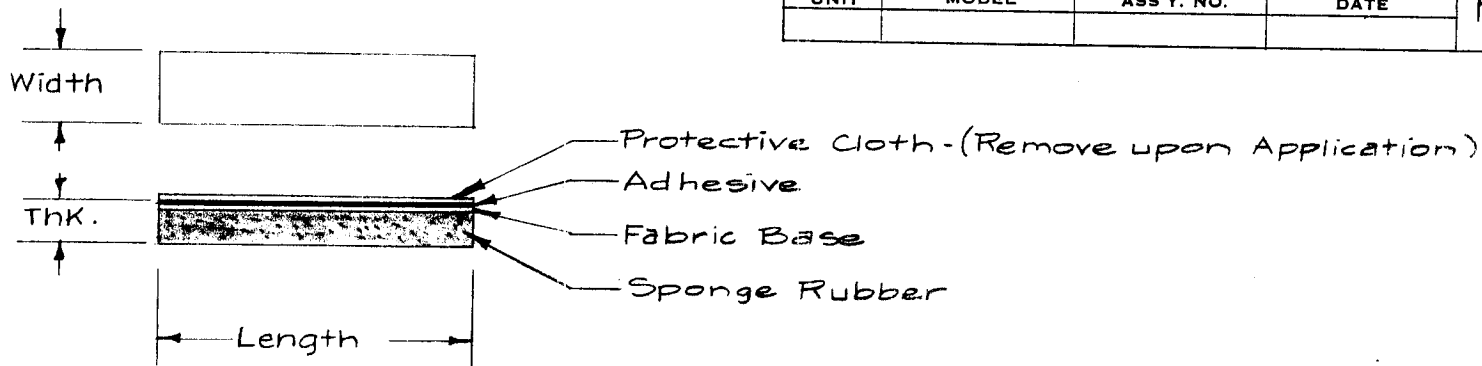

WIDTH CODE	WIDTH	AVAILABLE THICKNESS (in.)									
		1/8	3/16	1/4	5/16	3/8	7/16	1/2	9/16	1-1/2	
4	1/4"	X	X								
6	3/8"	X	X	X	X	X	X				
8	1/2"	X	X	X	X	X	X		X		
12	3/4"	X	X	X	X	X	X		X		
16	1"	X	X	X	X	X	X		X		
20	1-1/4"	X	X	X	X	X	X	X	X		
24	1-1/2"	X	X	X	X	X	X	X	X		
28	1-3/4"	X	X	X	X	X	X	X	X		
32	2"	X	X	X	X	X	X	X	X		
36	36"	X	X	X	X	X	X		X		
48	3"										X

Type Designation to be as follows:

RY-121-8-3-5.00

TMC DWG. No. WIDTH (in 16's) THKNESS (in inches) LENGTH REQ. (in inches)

EXAMPLE - RY-121-8-3-5.00 = Rubber Strip, 1/2" wide, 3/16" Thk., 5" Long.

D	WIDTH CODE 48 ADD; 1/2" THICKNESS	2-15-65	13449	LL	JPB		
C	CLERICAL CHANGE	8-24-64			WB		
B	REF CODE ADDED	7-17-63	9597		NO		
A	PURCHASING INFO DELETED	1/10/58	1	16	WDE		
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: 5401-225					
DEC. DIM. ±	FRAC. DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
ANGULAR DIM. ±		REM VE ALL BURRS AND SHARP EDGES					

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
N		THE TECHNICAL MATERIEL CORP.	
		MAMARONECK. NEW YORK	
		STRIP, SPONGE RUBBER	
MATERIAL		LG	ASJ
TYPE & TEMPER		DRAWN	CHECKED
HEAT TREAT. SPEC.			FINAL APPR VAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			RY-121-D