REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	SW-289	A
1	GPR-92	A-2120	9-11-61		

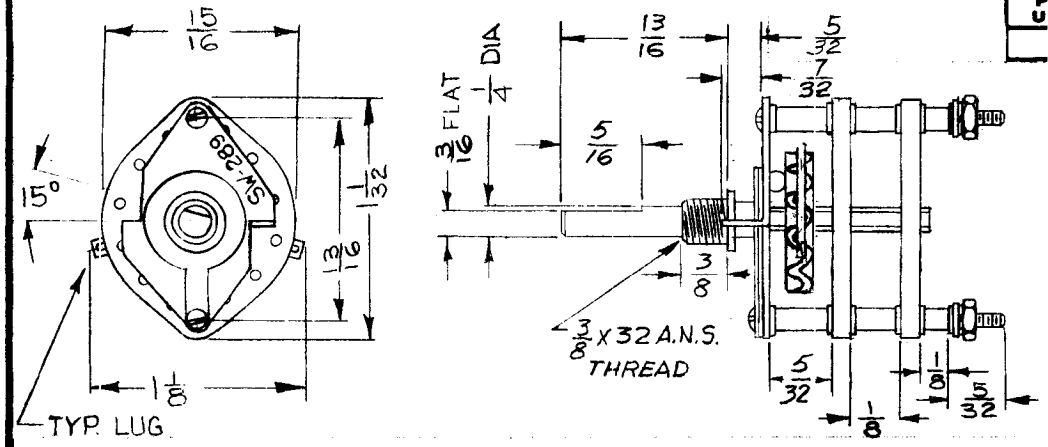

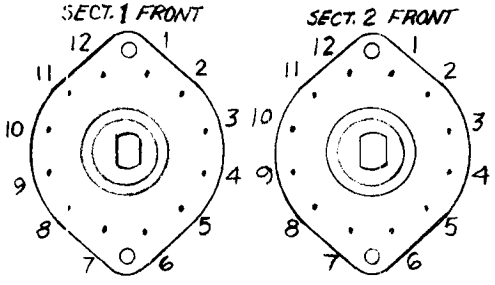

NUMBER OF SECTIONS 2
NUMBER OF POSITIONS 6
ANGLE OF THROW 30°

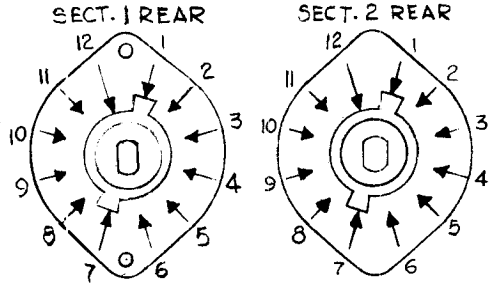

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER-CLOCKWISE POSITION.

SPECIFICATIONS:

CONTACT TYPE - SHORTING
INSULATION - 1/8" THICK CERAMIC (PER MIL-I-10, GRADE L-533)
FINISH REQUIREMENTS - COMMERCIAL
CONTACTS AND ROTORS - SILVER PLATED BRASS
MOUNTING HARDWARE SUPPLIED -
ONE 3/8-32 NUT, 1/2" ACROSS FLATS;
MATERIAL - BRASS
FINISH - NICKEL PLATING
ONE 3/8" INTERNAL TOOTH LOCKWASHER;
MATERIAL - BRONZE
FINISH - NICKEL PLATING
SHAFT - STEEL, COLD DRAWN; CADMIUM PLATED
STAMP PART NUMBER ON FACE PLATE - SW-289

MFR: CENTRALAB SERIES PA-116 W/SPECS SHOWN.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A		DIMS & SPECIFICATIONS CLARIFIED	1-4-63	8693			

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: N.T.S.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. | ITEM | PART NO. | DESCRIPTION | SYMB L

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

GELLMAN

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

SWITCH, ROTARY, CERAMIC

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

SW-289 | A

FORM 108-A