


STANDARD POSITION,
ALL OTHERS OPTIONAL.
SHOW POSITION
DESIRED IN SOLID BLACK.

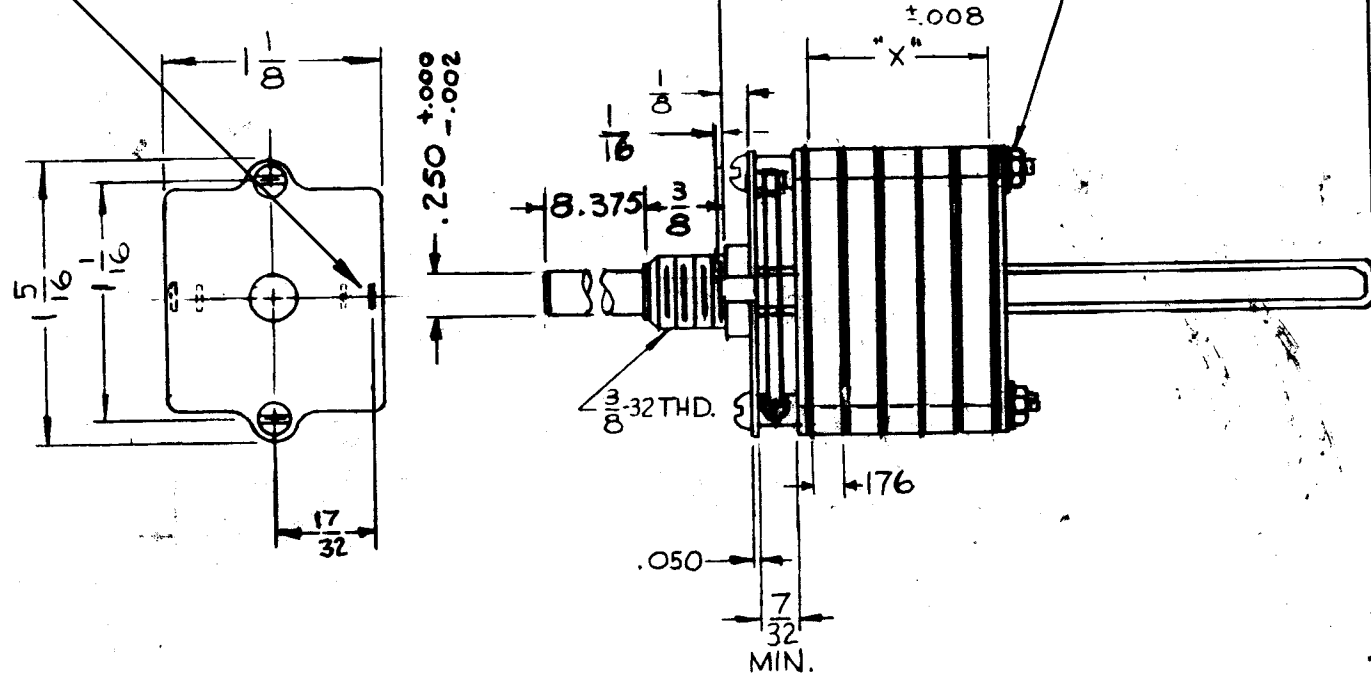

SW 368

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPERIMENTAL RELEASE	8-18-64	#	G.D.L.	
Ø	ORIGINAL RELEASE FOR PRODUCTION	8-27-64	#	G.D.L.	
A	LOCKING INDEX RELOCATED *360° ROTATION NO STOPS* NOTE ADD. TO SPECS	9.22.64	12424	hB	@ <i>PLW</i>
B	ADD BETWEEN 4 & 5 TO NOTE	12.13.64	17455	RME	<i>PLW</i>
C	SPECS REVISED	5.21.69	19449	GE	<i>PLW</i> EFM

TMC PART NUMBER: SW-368 STAMP ON FRONT PLATE
FRONT PLATE SHAPE: RECTANGULAR

MECHANICAL SPECIFICATIONS:
 NUMBER OF SECTIONS- 5 360° ROTATION
 NUMBER OF POSITIONS- 8 NO STOPS
 ANGLE OF THROW- 30°


CONTACTS:
 SHORTING TYPE, SECTIONS 1 THRU 5
 NON SHORTING TYPE, SECTIONS _____
 SILVER PLATED BRASS, SECTIONS 1 THRU 5
 SILVER ALLOY, SECTIONS _____

WAFERS:
 WHITE: GLASS/ALKYD 1 THRU 5
 CERAMIC, SECTIONS _____
 MYCALEX, SECTIONS _____
 IMPREGNATION (IF REQ.) _____

FINISH REQUIREMENTS:
 ARMY NAVY COMMERCIAL X
 SALT TEST (IF REQ.) _____

HARDWARE, TO BE SUPPLIED BY MANUFACTURER:
 1 QUAN. 3/8-32 NUTS 1/2 ACROSS FLATS
 MATERIAL BRASS PLATING NICKEL
 1 QUAN. 3/8 INTERNAL TOOTH LOCKWASHER
 MATERIAL BRONZE PLATING NICKEL

ELECTRICAL SPECIFICATIONS:
 MAXIMUM RATED VOLTAGE 28VDC 115AC
 MAXIMUM RATED CURRENT 1 ADC 1-1/2AC

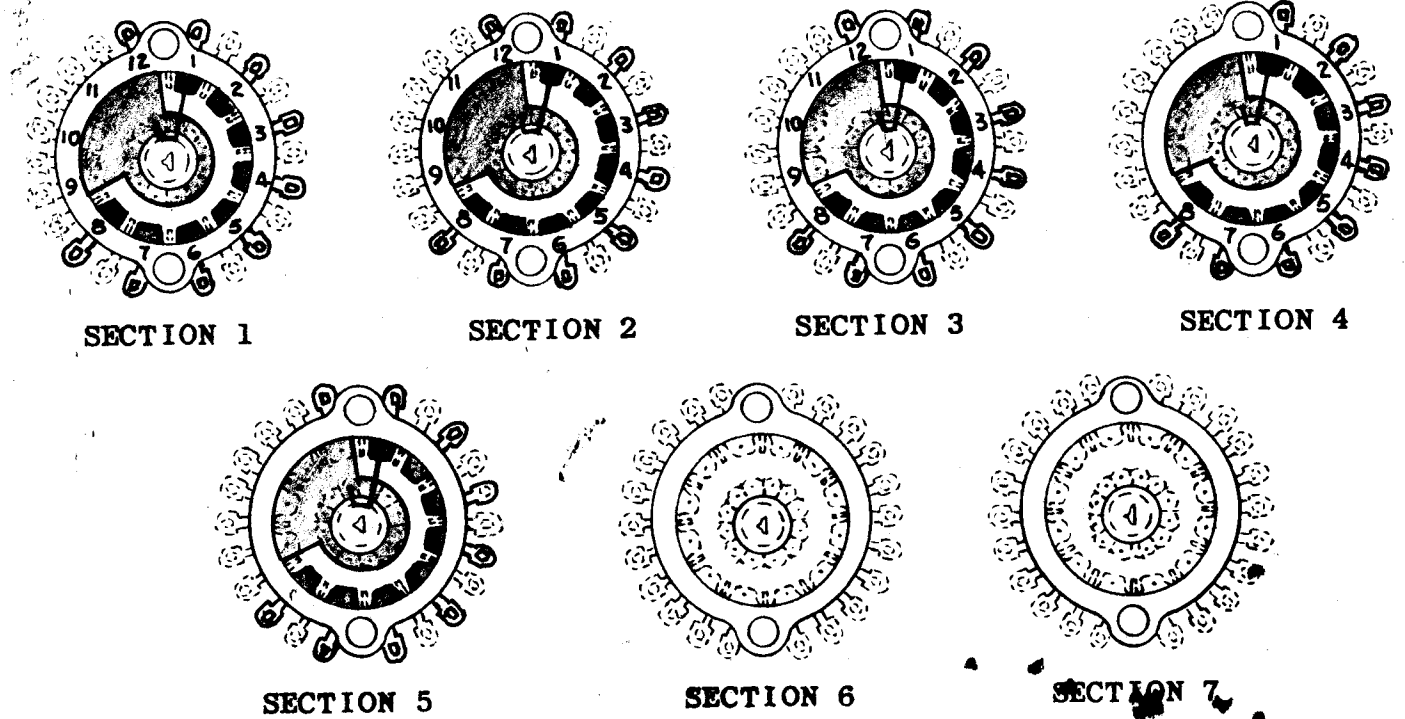

NOTE:
SHIELD ON FRONT, REAR & BETWEEN
SECTION 4 & 5.

Q'TY./UNIT	STANDARD	MODEL USED ON	ASS'Y. NO.
NONE	C	S401-175 (211)	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
T. AALTONEN LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE SWITCH, ROTARY	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN GDL DATE 8-18-64 CHECKED @ DATE 8-25-64 ELECT. DES. <i>PLW</i> DATE 8/18/64 MECH. DES. DATE	FINISH APPROVAL <i>RME</i> SW 368 SHEET
DECIMALS	TOLERANCES		FRACTIONS	REV LTR.
.X ± .05			± 1/64	C
.XX ± .01			ANGLES	
.XXX ± .005			± 0° 30'	

STANDARD DRAWING