IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

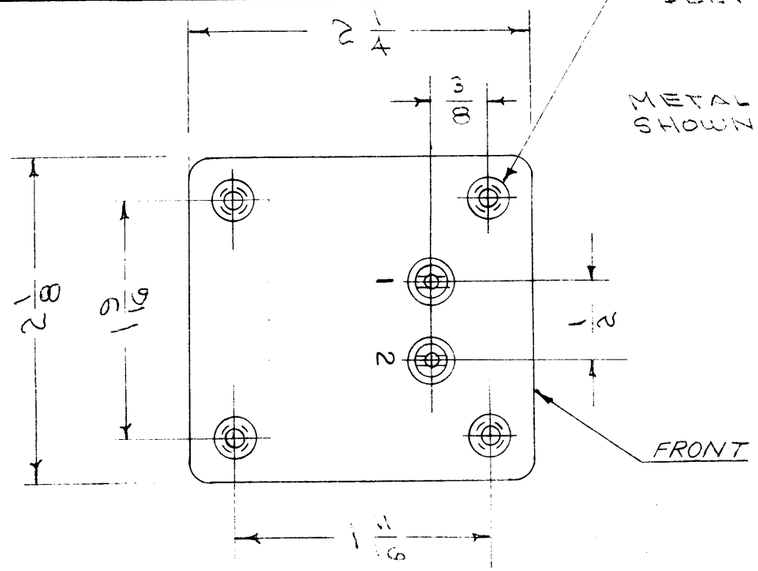

INSERTS 6-32 X 3/8 DEEP 4 REQ.

METAL STAMP AS SHOWN 182

A
991-FT

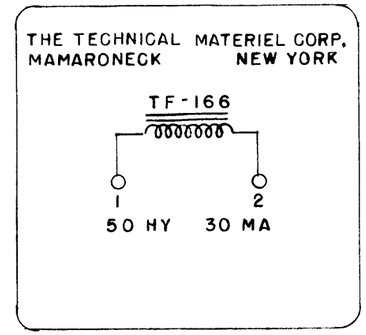

← SCHEMATIC DIAGRAM TO APPEAR ON END OPPOSITE TERMINALS

FRONT

ELECTRICAL SPECIFICATIONS
INDUCTANCE- 50 HY. AT FULL CURRENT RATING.
D.C. RES.- APPROX. 800 Ω.
D.C. CURRENT RATING- 30 MA.
INSULATION- WINDING TO BE INSULATED FOR 1500 V.

MECHANICAL SPECIFICATIONS
CASE- HERMETICALLY SEALED RECTANGULAR STEEL CASE.
FINISH- 9-115 T.M.C. SMOOTH GRAY ENAMEL. (EXCEPT TERM. END).
INSERTS- 6-32 X 3/8 DEEP.
SIZE- 2 1/8 X 2 1/4 X 3 1/8 HIGH EXCLUSIVE OF TERMINALS.

NOTE: MANUFACTURED IN ACCORDANCE WITH MIL SPEC T-27-A EXCEPT THAT MIL SPEC T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING IS NOT REQUIRED.

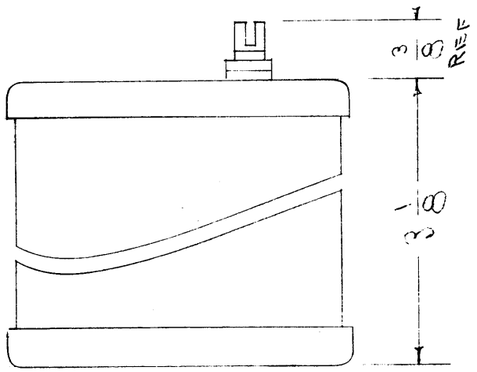

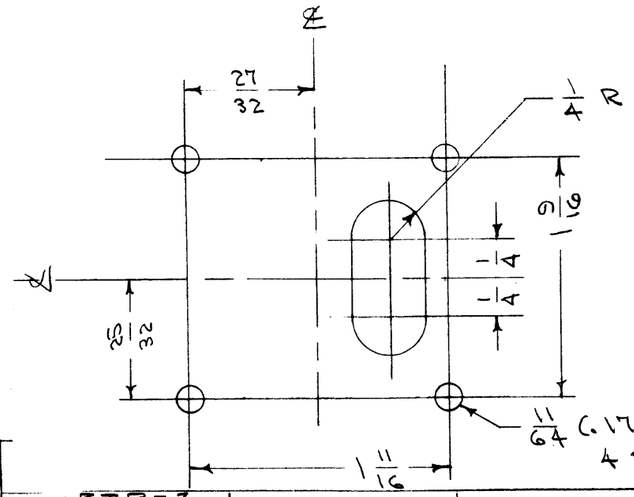

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	NOTE ADDED (MIL T-27-A)	6-29-60	2572	[illegible]		[illegible]

TOLERANCES
ALL OTHERS: DEC. DIM. ±, FRAC. DIM. ±1/64, ANGULAR DIM. ±
A
SCALE:
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	RTP-2 SPT-10K RTP RTC	AX-104		10-22-58 10-4-55

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE	REACTOR, FILTER	
		MATERIAL / WEIGHT PER PC.		
		TYPE & TEMPER	CDD. 10-4-55 / C.I.P. / CMC 10/26/55	
			DRAWN / ELEC. DES. APP. / MECH. DES. APP.	
		HEAT TREAT. SPEC. GRAY	CHECKED / A.J.J. FINAL APPROVAL	
		FINISH & SPEC. NO.	TF-166	