


STANDARD DRAWING

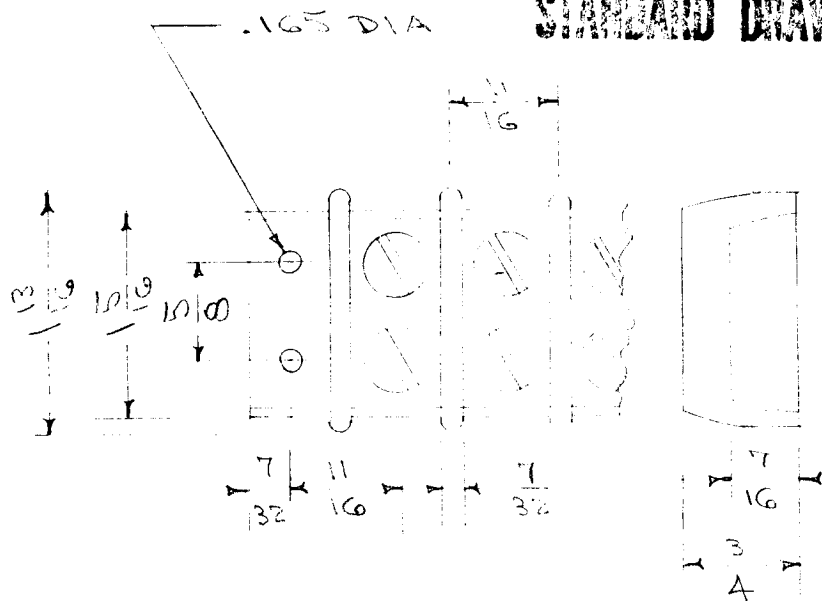

REQ. PER UNIT	USED ON			TM-118
	MODEL	ASS'Y. NO.	DATE	
TRIC NO.	CINCH-JONES CAT. NO.	KUKLA CAT. NO.	NO. OF TERMINALS	
TM-118-1	1-150	602-1	1	
-2	2-150	602-2	2	
-3	3-150	602-3	3	
-4	4-150	602-4	4	
-5	5-150	602-5	5	
-6	6-150	602-6	6	
-7	7-150	602-7	7	
-8	8-150	602-8	8	
-9	9-150	602-9	9	
-10	10-150	602-10	10	

NOTE THAT DASH NO. INDICATES NO. OF TERMINALS

SPECIFICATION:

- 1- PHENOLIC MATERIAL SHALL BE PLAIN BLACK BAKELITE.
- 2- SCREWS: - BINDER HEAD, BRIGHT NICKEL PLATE, 10-32 X 3/8 LONG
- 3- METAL SPACER: BRIGHT NICKEL PLATE.

IF THE STRIP IS CUT TO OBTAIN THE REQUIRED LENGTH, THEN, THE FINISHED SURFACE SHALL BE SMOOTH & FREE OF CHIPS OR ROUND EDGES. THE CUT SURFACE SHALL BE COATED WITH A CLEAR FUNGICIDAL MATERIAL.

REF: CINCH JONES & KUKLA ELEC. MFG. CO.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TERMINAL STRIP, 50 AMP. BARRIER TYPE		
									STOCK SIZE			
									MATERIAL			
TOLERANCES DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±								SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		DRAWN A.J.J.	CHECKED AM/10/26/50	FINAL APPROVAL A.J.J. TM-118
								TYPE & TEMPER	HEAT TREAT. SPEC.	ELEC. DES. APP.	MECH. DES. APP.	
								FINISH & SPEC. NO.				