

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A		6-32 STUDS WERE 3/8 LONG	5-17-67	18229	L.A.K.	<i>[Signature]</i>	KH <i>[Signature]</i>

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

TRO90 A

TR-090 ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE: 2-32 Mc/s.

PRIMARY: 600 ohm balanced  
200 ohm balanced

SECONDARY: 52 ohm unbalanced

MECHANICAL SPECIFICATIONS

LENGTH: 2-5/16".


WIDTH: 2-1/16".

HEIGHT: 2-1/2" (Excluding Terminals)

NO. OF TERMINALS: 6 ceramic turret type

MOUNTING: (4) 6-32 x 1/4" studs.

FINISH: TMC grey (S-115)

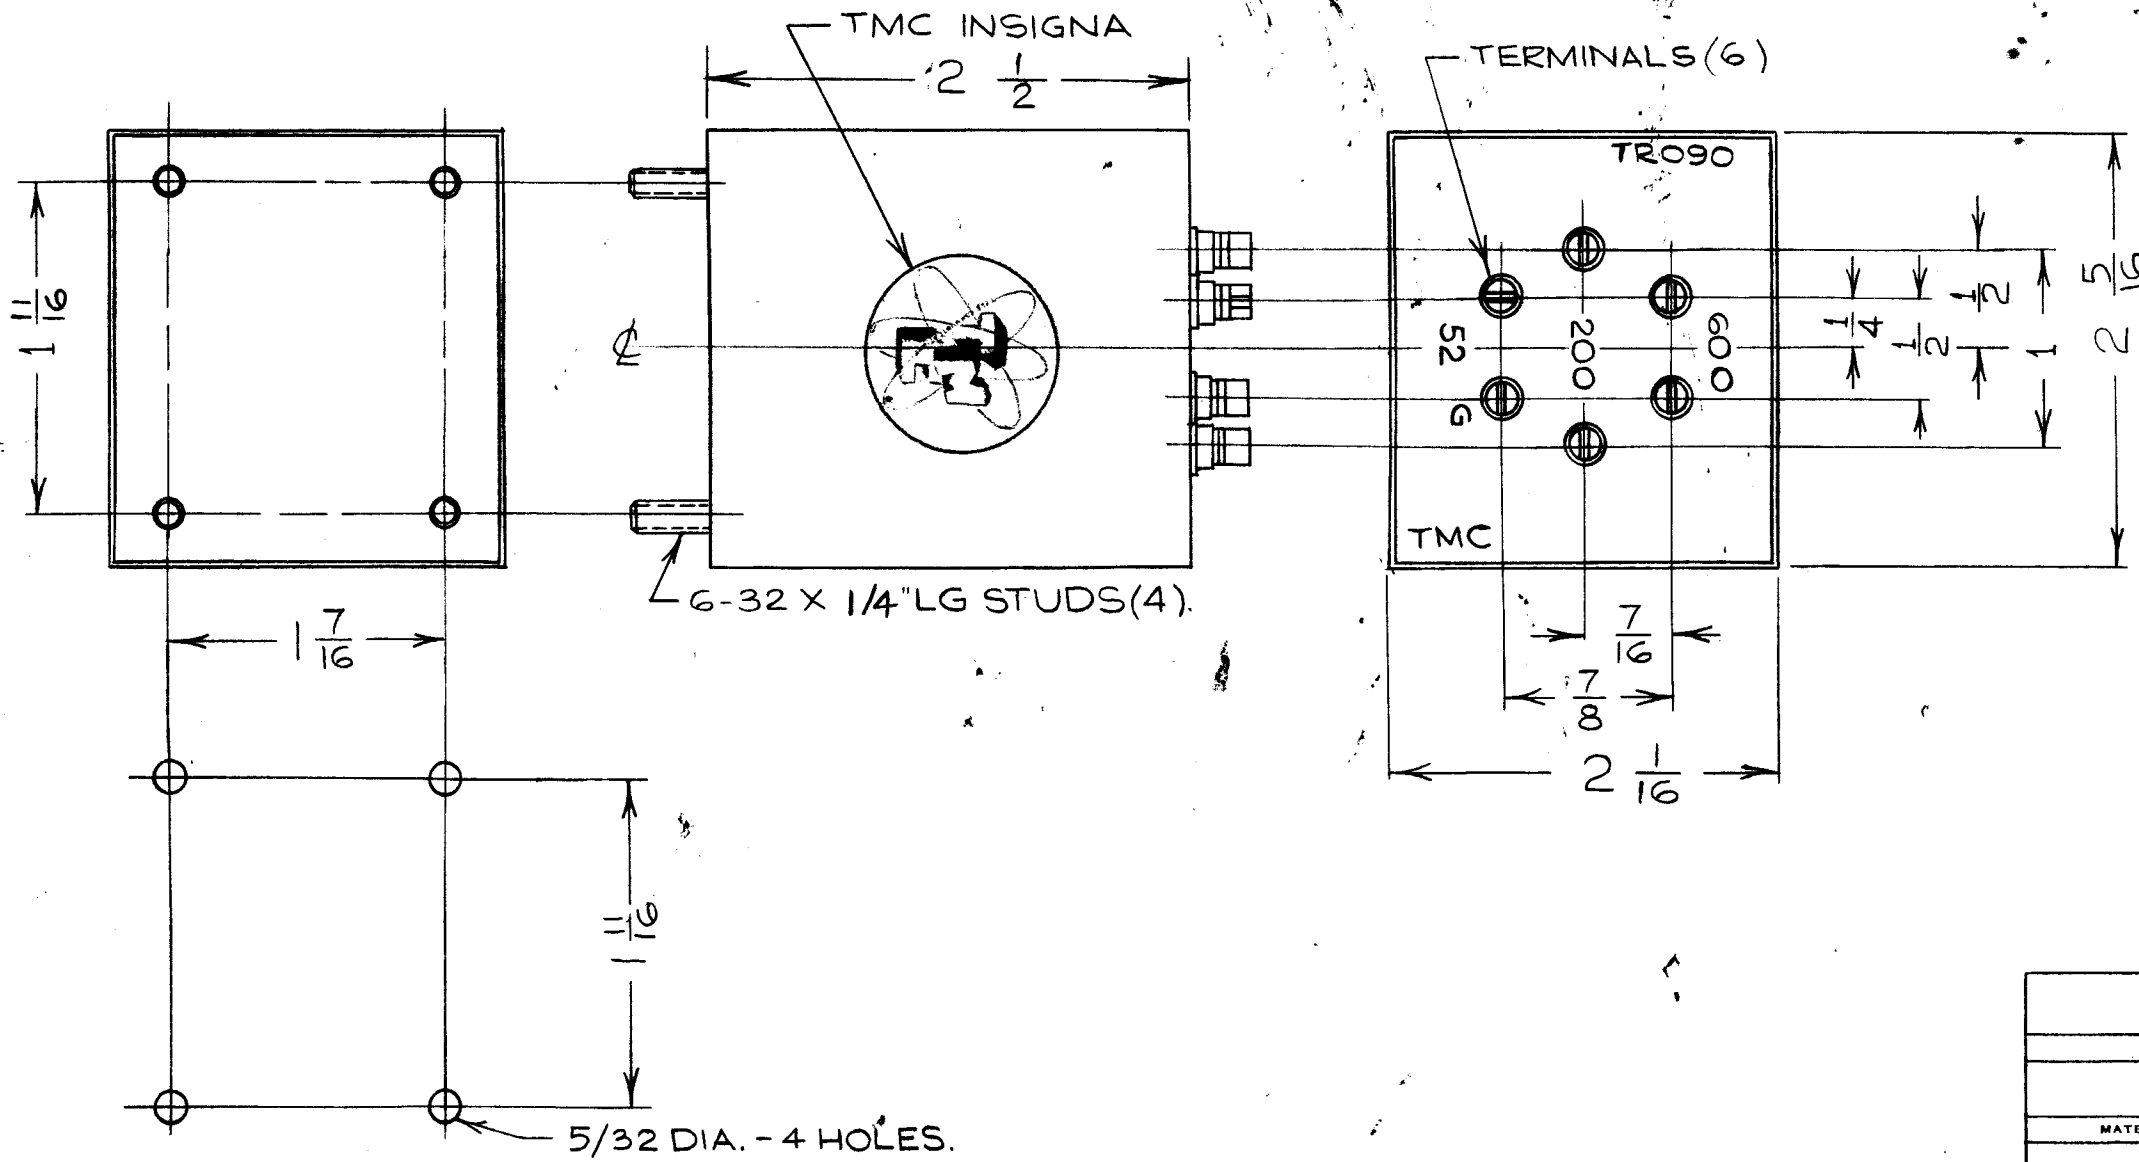

MTG. DIM'S.

TOLERANCES		SCALE: 4A-10324
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

TRO90	E-2570		JUNE 14/61
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON			

STOCK SIZE		<b>TMC (Canada) LIMITED</b> OTTAWA ONTARIO	
MATERIAL			
WEIGHT PER PC.		TRANSFORMER	
TYPE & TEMPER		BROADBAND - RF	
HEAT TREAT. SPEC.		JPC	RWJ
FINISH & SPEC. NO.		<i>[Signature]</i>	<i>[Signature]</i>
		CHECKED	FINAL APPROVAL
		TRO90 A	