


STAMP 3/16 HIGH BLACK GOTHIC

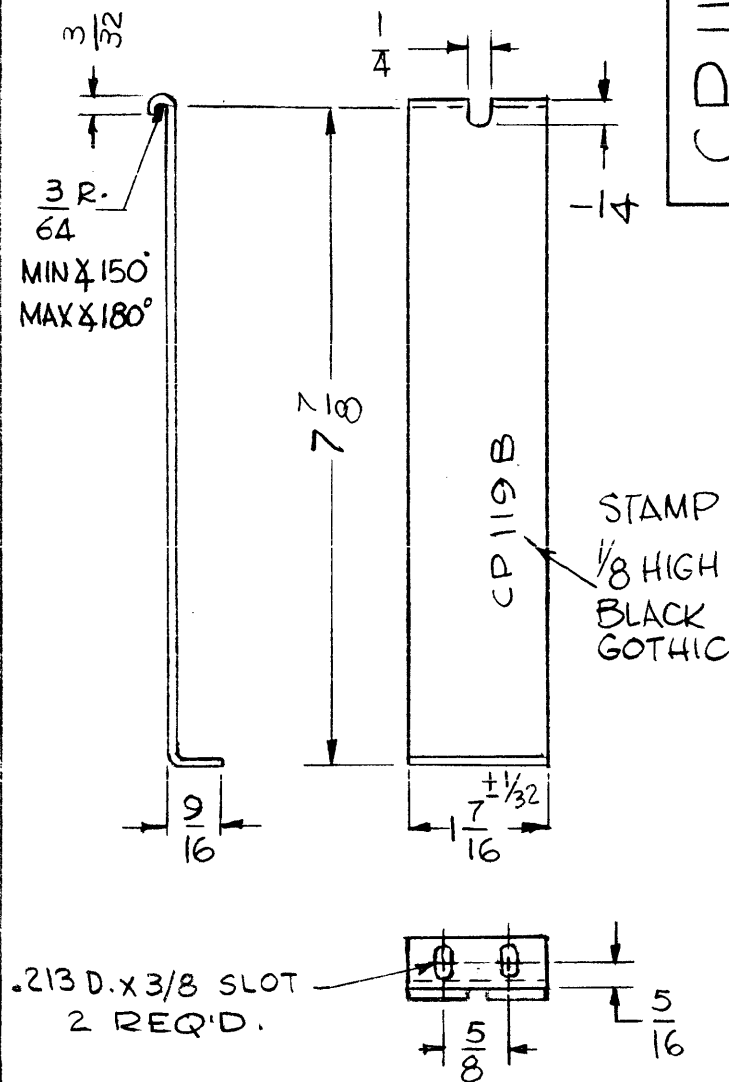

BRACKET MOUNTING
(TO BE SUPPLIED BY MFG #1141-91)

STAMP TMC PART NO. CP119 B
1/8 HIGH GOTHIC.

CP119

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X1	MANUFACTURE,	11/17/65				
Ø	ORIGINAL RELEASE FOR PRODUCTION	3/18/66	Ø	MW		

- SPECIFICATIONS -

- 1-CAPACITY : .3MF ± 10%
- 2-WORKING VOLTAGE : 10,000VDC
- 3-DIELECTRIC STRENGTH TEST : 15,000 VDC TERM. TO TERM.
- 4-DISSIPATION FACTOR : 1% MAX. AT 25°C
- 5-INSULATION RESISTANCE AT 25°C. 6600 MEGOHMS MIN.
- 6-OPERATING TEMP. RANGE : -55°C TO +85°C
- 7-CONSTRUCTION : METAL CASED, HERMETICALLY SEALED

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
--------	------	-------------	-------------	--------

BUDETTI LIST OF MATERIAL

MATERIAL	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
----------	--

FINISH	S115-TMC GREY	TITLE	CAPACITOR, FIXED
--------	---------------	-------	------------------

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN G.D.L. DATE 3-7-66	FINAL APPROVAL	DATE 3/17/66
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CHECKED [Signature] DATE 3-16-66
			ELECT. DES. [Signature] DATE 3-17-66
			MECH. DES. [Signature] DATE
			SHEET
			REV. LTR.

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

3	GPT-10KLF	ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE	CODE	
DO NOT SCALE	C	3401-112-98102