

PL-157 A

SPECIFICATIONS

SERIES ~ QDS  
 NO. OF CONTACTS ~ ONE (1)  
 TYPE OF CONTACTS ~ MALE  
ELECTRICAL DATA  
 MAX. PEAK OPER. VOLT. ~ 5,000 V.  
 FREQ. LIMIT ~ 10,000 MCS  
 NOM. IMPEDANCE ~ 50Ω

CABLE ACCOMODATIONS

TYPE ~ RG-59/U


MATERIAL

EXTERNAL PARTS ~ BRASS  
 CONTACT ~ BRASS  
 GASKETS ~ SILICONE RUBBER

FINISH

EXT. PARTS ~ SILVER PLATE & RHODIUM FLASH.  
 CONTACT ~ SILVER PLATE & GOLD FLASH.

PROPERTY OF THE TECHNICAL MATERIEL CORP.  
 THIS DRAWING IS THE PROPERTY OF THE TECHNICAL MATERIEL CORP.  
 IT IS TO BE KEPT IN CONFIDENCE AND NOT TO BE REPRODUCED OR  
 COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE  
 TECHNICAL MATERIEL CORP.

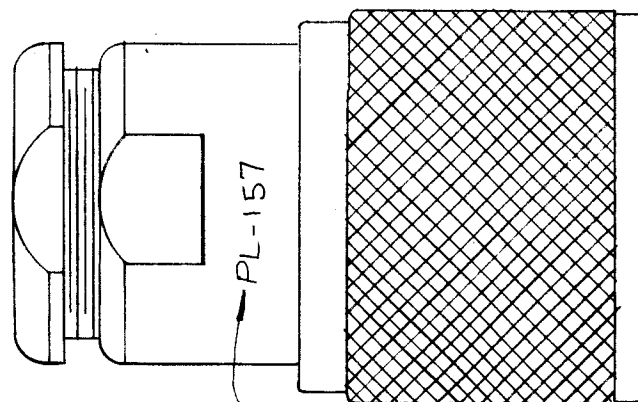

METAL STAMP TMC PART NO AS SHOWN 1/16 HIGH GOTHIC.

NOTE ~ USE TMC SPEC. S-345/QDS FOR CABLE ASS'Y.

A	REDRAWN W/SPECS	5/15/61		DM	JCB	DM
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE: 5-401-70 (3290)				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64		DECIMALS ± .005		ANGLES ± 1/2°		
REMOVE ALL BURRS AND SHARP EDGES		REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE		CONNECTOR, PLUG, QDS SERIES	
MATERIAL			
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER
		DM/asm	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			PL-157
			A