


CA1225

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-16-66	AA	Jc		

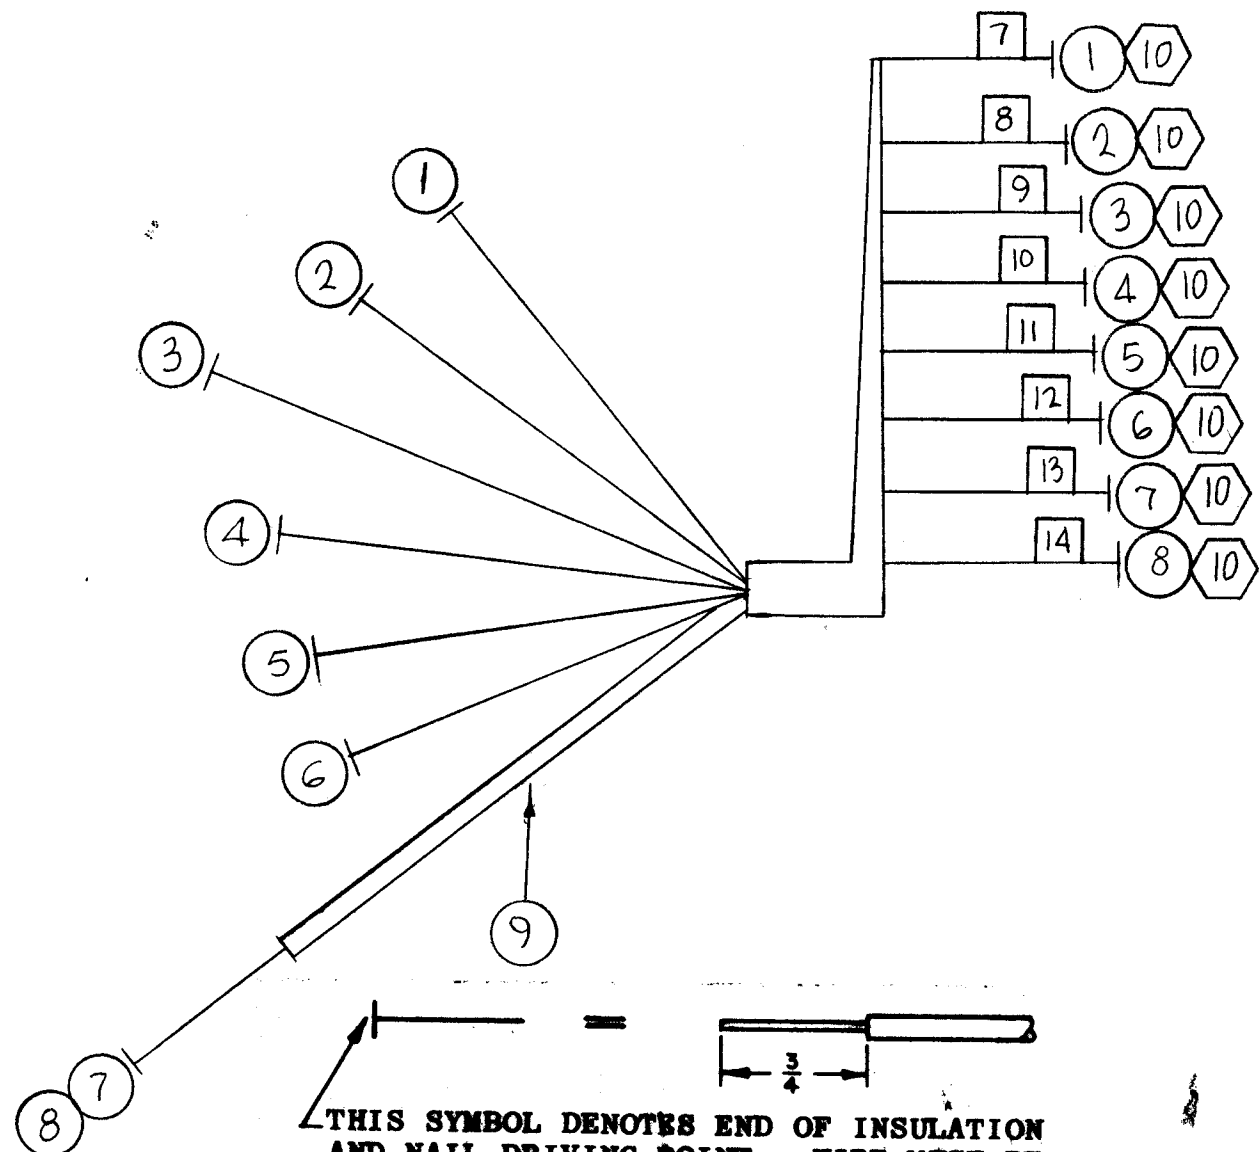

SYMBOL - DENOTES


- = ITEM NO'S
- ⬡ = LUGS
- = WIRE MARKERS

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.



NOTES

1	GPT-10KLF	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	13	BS100	SOLDER, TIN, ALLOY	
X	12	CD101-1-MW	CORD, NYLON, LACING	BLACK
8	11	LA101	BAND, MARKER, CBL	
8	10	TE120-2	TERM, LUG, SPADE	
	9	PX100-1-186	INS. SLVG, ELECT	BLACK
	8	MWC18(16)U1	WIRE, ELECT, INS.	BROWN
	7	MWC18(16)U1		BROWN
	6	MWC20(7)U6		BLUE
	5	MWC18(16)U9		WHITE
	4	MWC20(7)U91		WH/BRN
	3	U2		RED
	2	U4		YELLOW
	1	MWC20(7)U94	WIRE, ELECT, INS.	WH/YEL

F. BUDETTI LIST OF MATERIAL

MATERIAL: _____

FINISH: _____

TITLE: CABLE, ASSEMBLY (AR-179) PA PLATE OVLD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DRAWN	DATE 12-6-65	FINAL APPROVAL	DATE 2/16/66
CHECKED	DATE 2-15-66		
ELECT. DES.	DATE		
MECH. DES.	DATE		

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS: ± 1/64, ANGLES: ± 0° 30'

TOLERANCES

CA1225

M/L 2/16