


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
-	O	ORIGINAL RELEASE FOR PRODUCTION	4/24/64	O	A.M.	@
-	A	IT. 21 ADD., IT. 1 THRU 18 WAS MWC 28 (7)	10.8.64	12583	lsb	@ TRC

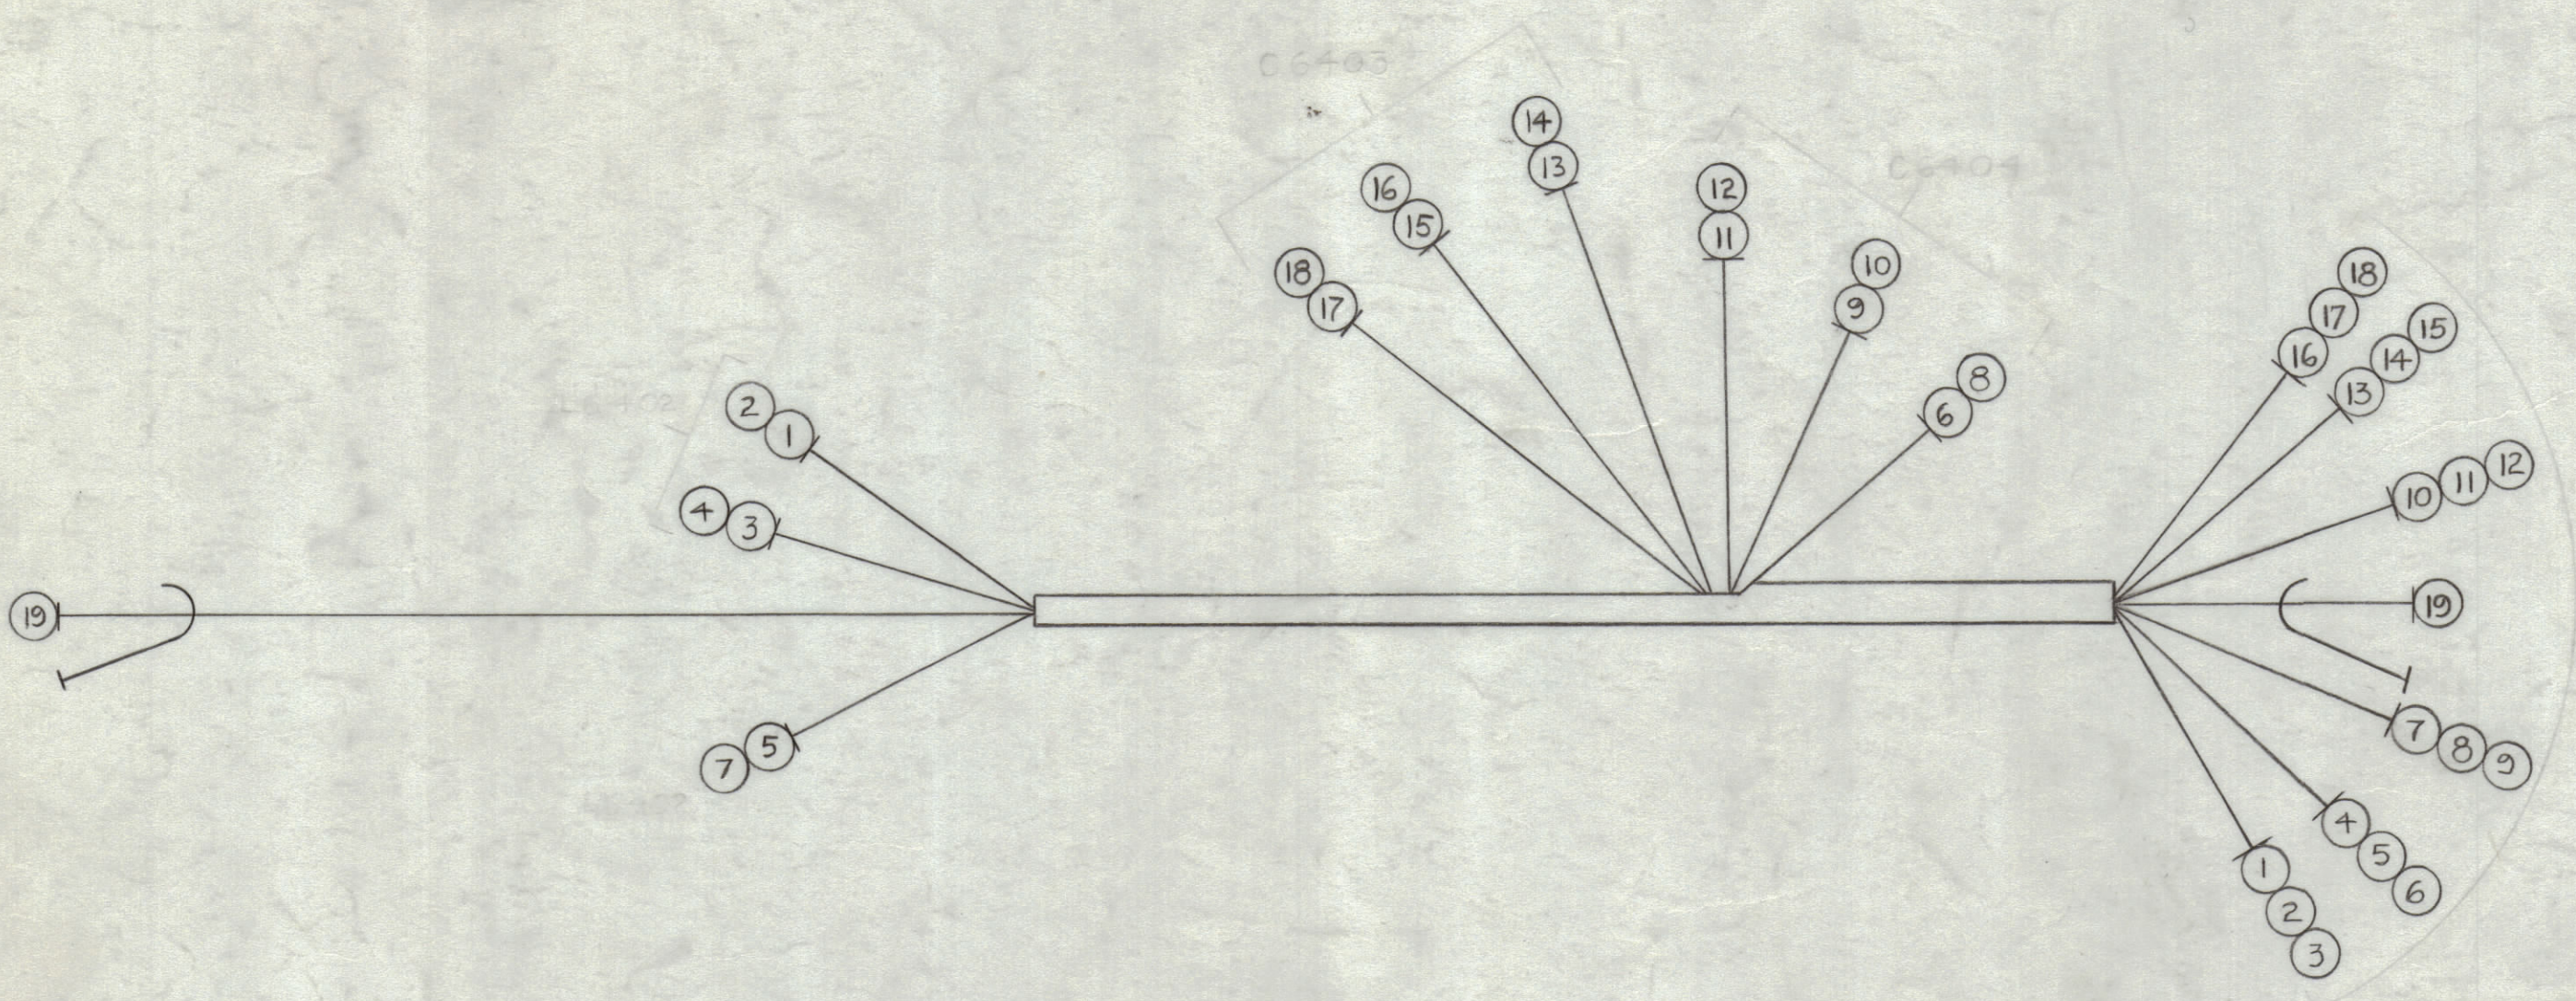

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

REQ'D.	ITEM	PART NUMBER	FROM	TO	SYMBOL
	23				
	22				
X	21	BS100	SOLDER, TIN ALLOY		
-	20	CD-101-1-MW	CORD, LACING		BLK
14 1/2	19	RG-174/U	J6402	S6402-A-1	
8	18	LWC28(7)U6	C6403-C	S6402-A-2	
8	17		5	C6403-5	S6402-A-3
8	16		4	C6403-4	S6402-A-4
8	15		3	C6403-3	S6402-A-5
8	14		2	C6403-2	S6402-A-6
8	13		1	C6403-1	S6402-A-7
7 1/4	12		91	C6404-1	S6402-C-7
7 1/4	11		94	C6404-4	S6402-C-4
7	10		92	C6404-2	S6402-C-6
7	9		95	C6404-5	S6402-C-3
6 3/4	8		93	C6404-3	S6402-C-5
10 3/4	7		8	L6402-4	S6402-B-6
6 3/4	6		96	C6404-C	S6402-C-2
10 3/4	5		98	L6402-3	S6402-B-7
10 3/4	4		7	L6402-5	S6402-B-5
10 3/4	3		97	L6402-C	TIE POINT
10 3/4	2		90	L6402-7	S6402-B-3
10 3/4	1	LWC28(7)U0	L6402-6	S6402-B-4	

AALTONEN LIST OF MATERIAL				
MATERIAL	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH	TITLE HARNESS, WIRING, BRANCHED LOW CUTOFF			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN	DATE	FINAL APPROVAL	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	Checked	1-9-64		4/20/64
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES.	DATE	CA-847	A
TOLERANCES	MECH. DES.	DATE		

MAF-1		
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES