

STANDARD DRAWING

CL-10005 A

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

USED ON

MODEL PROJECT NO. ASS'Y. NO. DATE


AMC 6-5 CE 64-6

MAY 16/60

TMC PART NO.	MANUF. P/N	BAND NO.1 COLOR	BAND NO.2 COLOR	BAND NO.3 COLOR	L μ h	TOL	Q MIN	TEST FREQ MC	5 RF MC	DC Ω MAX	D \pm	L \pm	W \pm
CL-10005-1	2950-23	BLUE	GOLD	GREY	6.8	$\pm 10\%$	60	7.9	75	1.05	$\pm 1/32$	$\pm 1/16$	$\pm 3/16$
CL-10005-2	2950-33	YELLOW	VIOLET	BLACK	47.0	$\pm 10\%$	65	2.5	16	1.00	$\pm 1/32$	$\pm 1/16$	$\pm 1/16$

(MIL. IDENTIFIER)
SILVER BAND
BAND NO. 1
BAND NO. 2
BAND NO. 3

INDUCT. COLOR	TOLERANCE TOL
GOLD	5%
SILVER	10%
NONE	20%

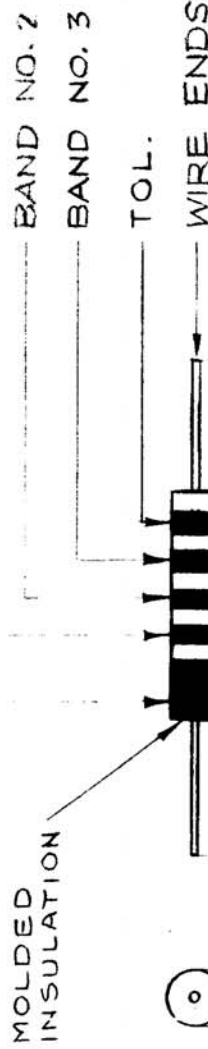

MFG IN ACCORDANCE WITH MIL-C-15305 AND AMEND. + MS 91189 MIL TYPE LT4K

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL	WEIGHT PER PC.	COIL, RF, FIXED	
TYPE & TEMPER		MOLDED	
HEAT TREAT. SPEC.			
FINISH & SPEC. NO.			

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS CHECKER	ENG. APP.
B	REVISED COMPL.	7.7.64	11708	JSB	JSB
A	REDRAWN	5/16/60		MK	

TOLERANCES	
DEC. DIM. \pm	DIMENSIONS IN INCHES
FRAC. DIM. \pm	UNLESS OTHERWISE SPECIFIED
ANGULAR DIM. \pm	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

SCALE	100045-9
DRAWN	1-500
CHECKED	
FINAL APPROVAL	