HOLES	DESCRIPTION	REQ.
A	.484 - .487 DIA.	3
B	9/16 DIA	3
C	1" DIA	1

MS4610 Ø

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	Original Release for Production	3.14.66	Ø	HLA		

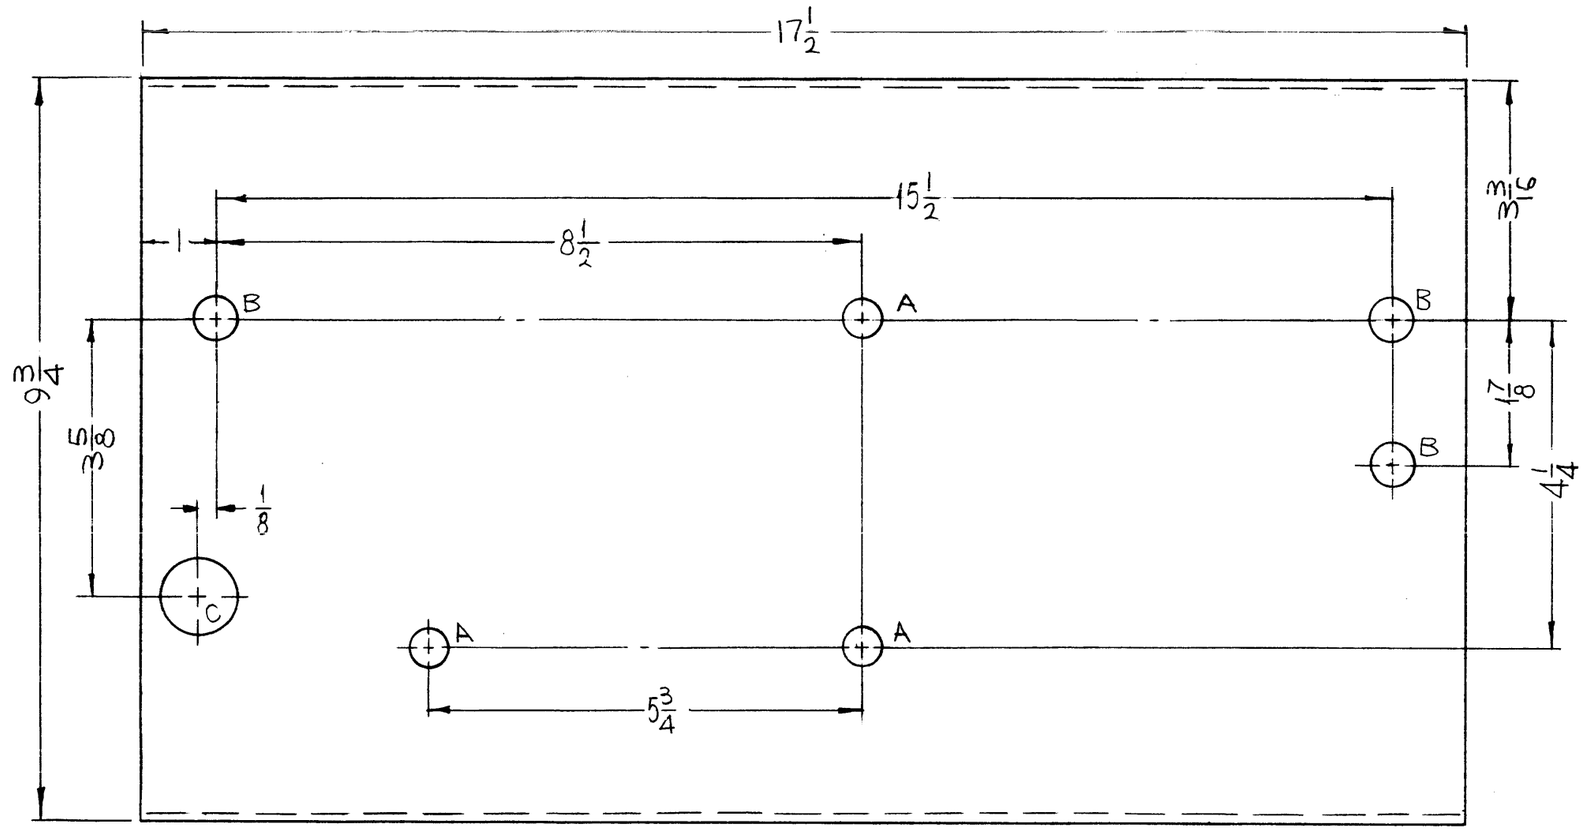

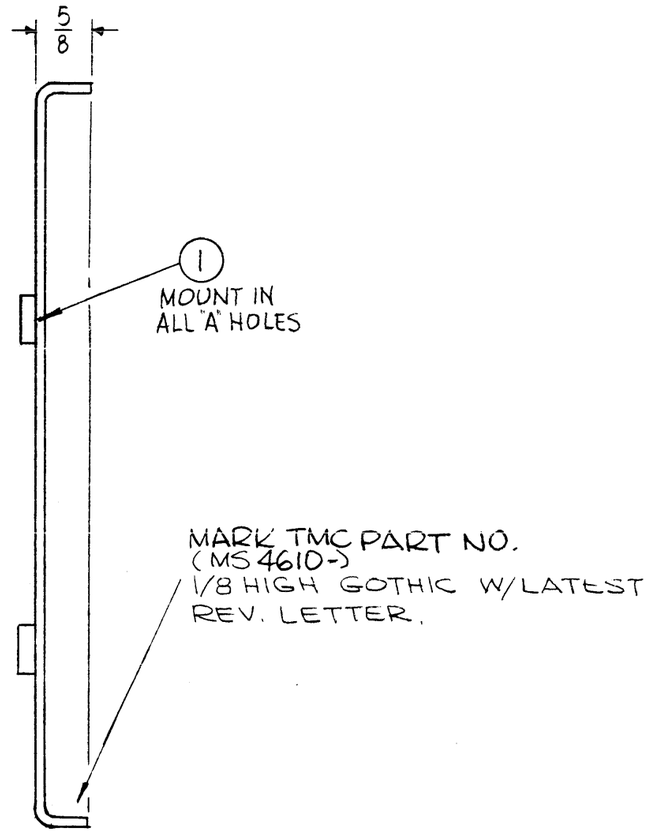

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

1	TST - 10K	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1/2 : 1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

3	1	NT129-616-6	NUT, PLAIN, SPLINE	A
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

F. BUDETTI

LIST OF MATERIAL

MATERIAL: 1/8 THICK ALUMINUM 5052-H32

FINISH: S404 YEL. IRIDITE

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: PLATE, MTG XFMR

DRAWN	6-4-65	FINAL APPROVAL	3/14/66
CHECKED	3-9-66		
ELECT. DES.		MS4610	Ø
MECH. DES.	3/14/66	SHEET	REV. LTR.

TMC FORM 109

REPROVEL NO. 440H 23058