REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X3	REDRAWN & REVISED	10/10/66				
	X4	④"F" HOLES CHANGED TO "A" HOLES, "F" HOLES WERE 6-32 C'SK, ①"B" HOLE ADDED ③"A" HOLES RELOCATED	12/1/66	VM	JC		
	X5	(4) "C" HOLES WERE "A" HOLES ON BOTTOM VIEW DIMS 17/32 WAS 9/16 & 23/32 WAS 3/4	1-13-67		G.D.L		
	X6	DIM 5/8 WAS 23/32 - DIM 9/16 WAS 17/32. DIM 5/16 WAS 4 15/16	1-23-67		G.D.L		
	X7	"H" HOLE WAS "D" HOLE	3-2-67		G.D.L		
4C	X8	DIM. 1/2 WAS 9/16	4-26-67		G.D.L		
	Ø	ORIGINAL RELEASE FOR PRODUCTION	6-26-67	Ø	RG		
	A	MOD. HFSR-4 DELE. MOD. MMX-( ) ADDED	10/23/67	C.C.			

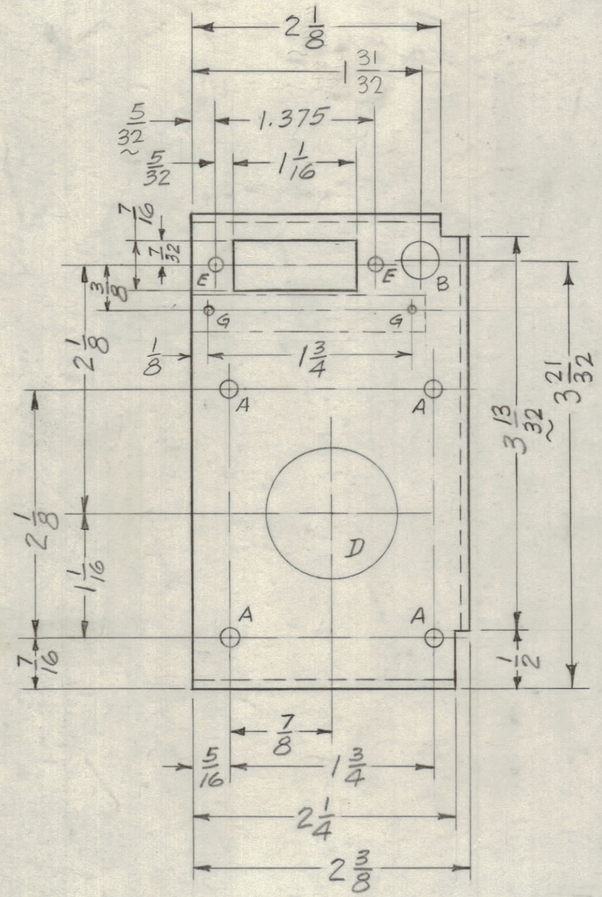

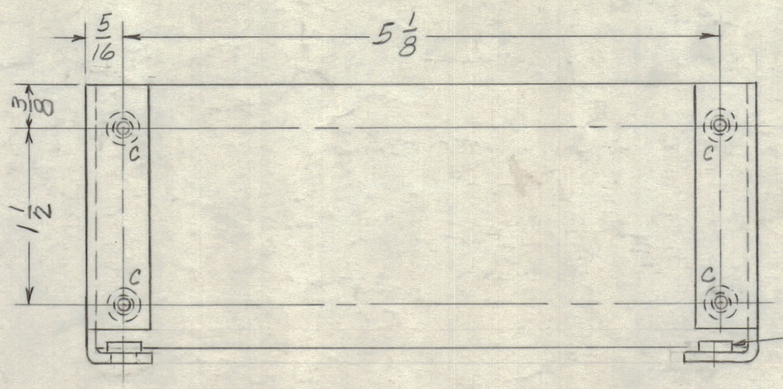

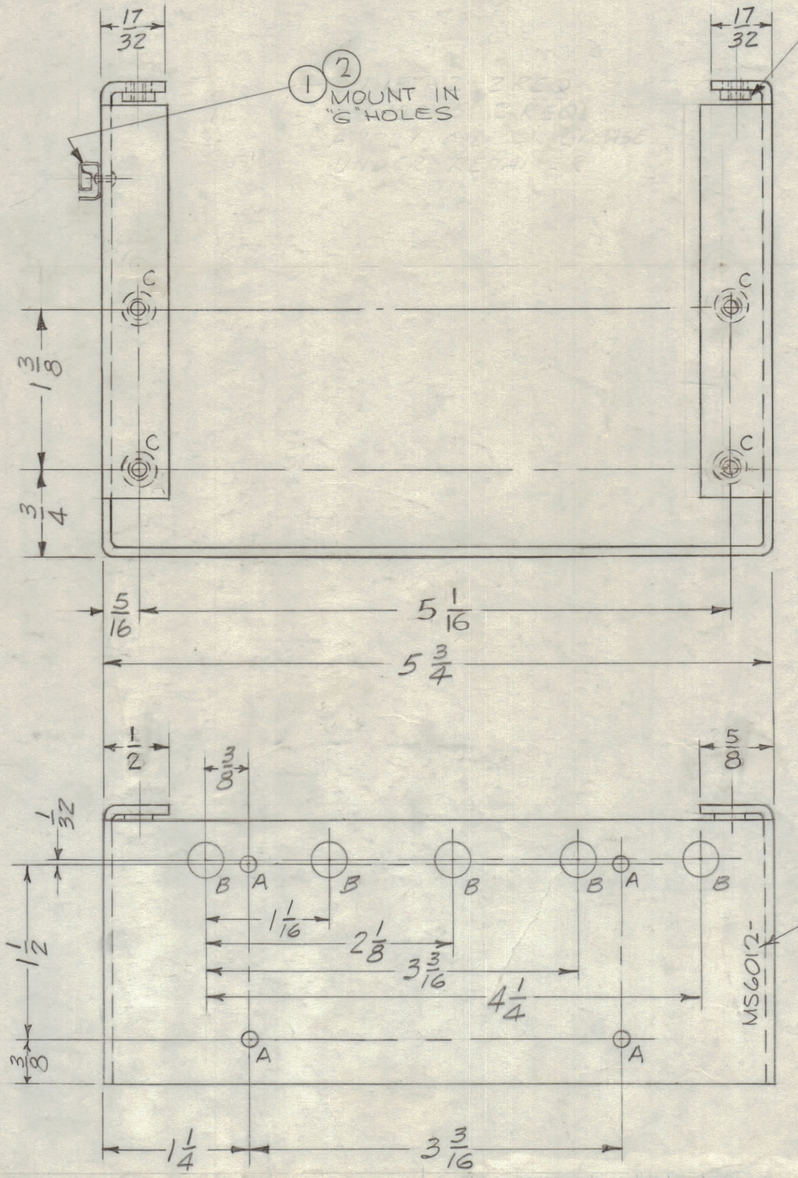

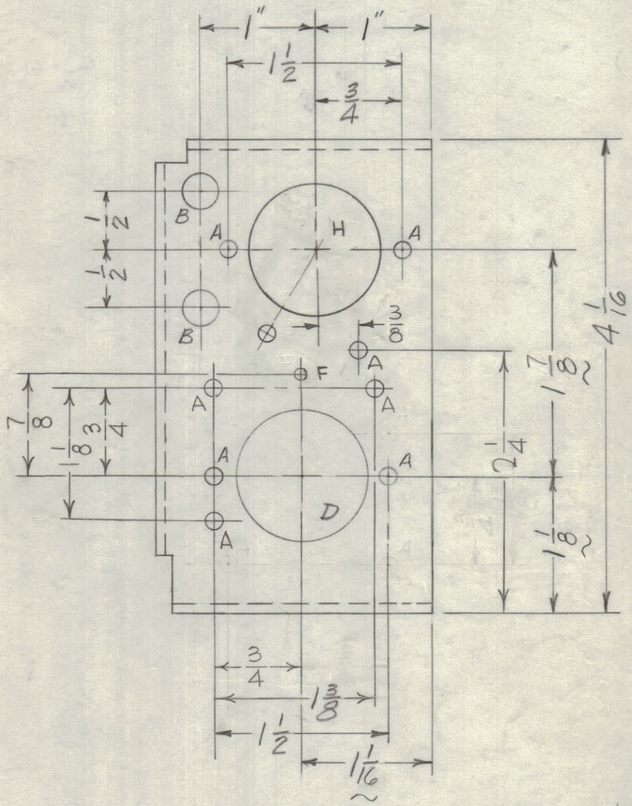

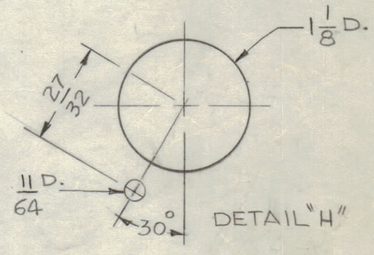

HOLE	DESCRIPTION	REQ.
A	11/64 DIA	16
B	5/16 DIA	8
C	.191 - .194 DIA.	8
D	1 1/8 DIA	2
E	9/64 DIA	2
F	3/32 DIA	1
G	.067 DIA	2
H	SEE DETAIL	1

MARK TMC PART NO.
1/8 HIGH GOTHIC
W/LATEST REV. LETTER.

REF: LD 2203

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
8	3	NT129-632-4	NUT, PLN, SPLINE	C
2	2	EY100-5	EYELET, FLAT FLANGE	G
1	1	CU157-2	RETAINER, PC BOARD	G

O. POSE — LIST OF MATERIAL — SK3213MS40

Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.
1	MMX-( )	AX652
1	MMX-1	AX652
1	VOX-7	AX651

SCALE 1:1 — CODE A — S401-451

MATERIAL .081 ALUMINUM 5052-H32

FINISH S 404 YEL. IRIDITE

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: BRACKET, MTG. POWER SUPPLY

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DRAWN	G.D.L	DATE	1-23-67
CHECKED		DATE	6-22-67
ELECT. DES.		DATE	
MECH. DES.		DATE	6/26/67
FINAL APPROVAL		DATE	6/26/67

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64 — ANGLES ± 0° 30'

MS 6012 — A — SHEET — REV. LTR.

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

MS6012 A

TMC FORM 110

REPROVEL NO. 440H 14108